

Description

BL1117 is a series of low dropout three-terminal regulators with a dropout of 1.3V at 1A load current. BL1117 features a very low standby current 2mA compared to 5mA of competitor.

Other than a fixed version, $V_{OUT} = 1.2V, 1.5V, 1.8V, 2.5V, 3.3V, 5V, \text{ and } 12V$, BL1117 has an adjustable version, which can provide an output voltage from 1.25 to 12V with only two external resistors.

BL1117 offers thermal shut down and current limit functions, to assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$. Other output voltage accuracy can be customized on demand, such as $\pm 1\%$.

BL1117 is available in SOT223, TO252-2 power package.


Features

- Other than a fixed version and an adjustable version, output value can be customized on demand.
- Maximum output current is 1A
- Range of operation input voltage: Max 18V
- Standby current: 2mA (typ.)
- Line regulation: 0.1%/V (typ.)
- Load regulation: 10mV (typ.)
- Environment temperature: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- Compatible with tantalum capacitor, electrolytic capacitor and MLCC

Applications

- Power management for computer mother board, graphic card
- BLD monitor and BLD TV
- DVD decoder board
- ADSL modem
- Post regulators for switching supplies

Typical Application Circuit

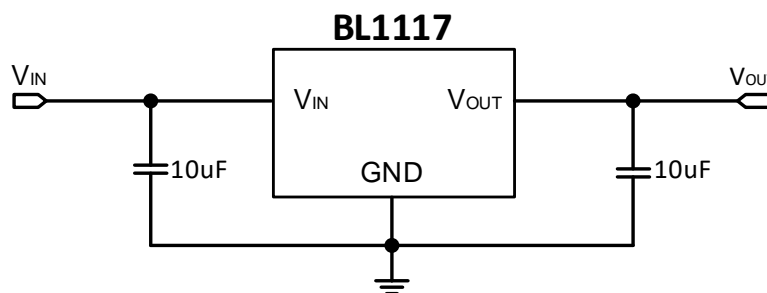

Ordering Information

BL1117- XX X X

Package:

X: SOT223

Y: TO252-2

Temp. Range & Rohs Std.:

A: 125°C & Pb-free Rohs Std,

Output voltage accuracy within $\pm 1\%$

C: 125°C & Pb-free Rohs Std,

Output voltage accuracy within $\pm 2\%$

Output Voltage:

12: 1.2V

15: 1.5V

18: 1.8V


25: 2.5V

33: 3.3V


50: 5.0V

Default: Adjustable Version

Pin Configuration



SOT223



TO252-2

| Pin No. | Symbol | Function |
|---------|------------------|--------------------|
| 1 | GND/ADJ | Ground/ Adjustable |
| 2 | V _{OUT} | Output |
| 3 | V _{IN} | Input |

A: Means assembly year and week

| Year | 2020 | 2021 | 2022 | 2023 | ... |
|------|------|------|------|------|-----|
| Y | 0 | 1 | 2 | 3 | ... |


| Week | 1 | 2 | ... | 26 | 27 | ... | 52 | 53 |
|------|---|---|-----|----|-----------|-----|-----------|----|
| W | A | B | ... | Z | \bar{A} | ... | \bar{Z} | A |

B: Means Manufacture LOT No.

C: Means Output Voltage Value

D: Means Temp. Range & Rohs Std.

Block Diagram

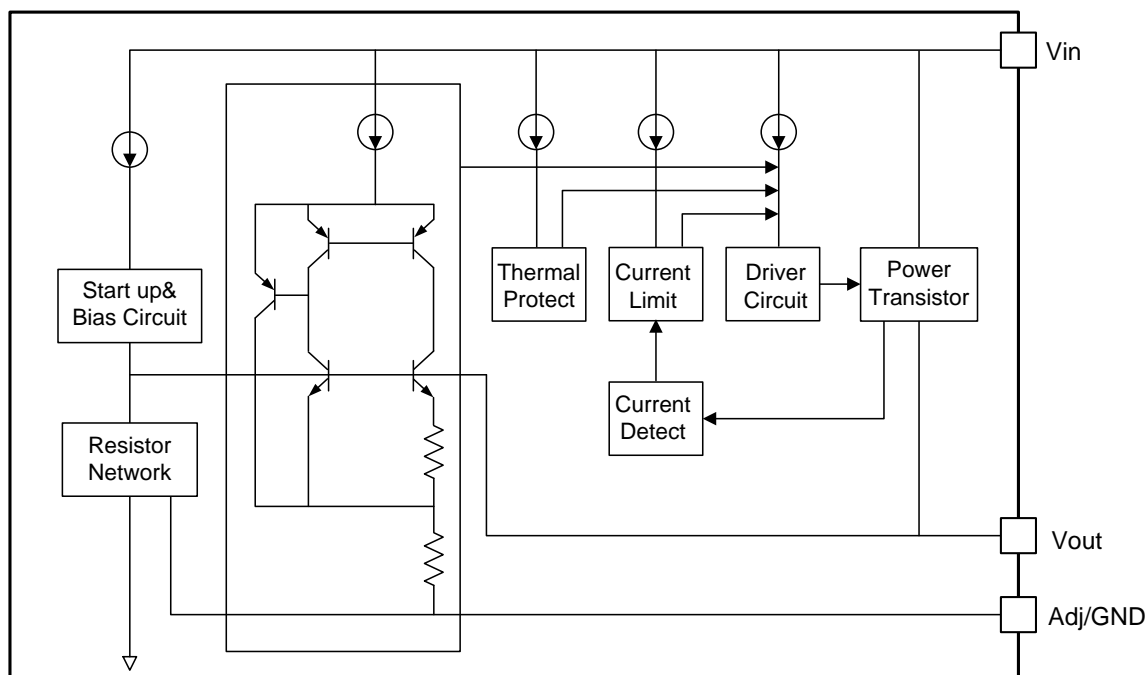

Absolute Maximum Rating

| Parameter | Value | Unit |
|---|------------|------|
| Maximum input voltage | 18 | V |
| Maximum operating junction temperature (T_J) | 150 | °C |
| Ambient temperature (T_A) | -40 ~ +125 | °C |
| Power Dissipation (P_D) | SOT223 | 1.78 |
| | TO252-2 | 2.23 |
| Thermal resistance (θ_{JA}) (Junction to ambient) | SOT223 | 70 |
| | TO252-2 | 56 |
| Storage temperature | -40 ~ +150 | °C |
| Lead temperature & time | 260°C, 10s | |

Note:

1. Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product.
2. The maximum allowable power dissipation is a function of the maximum junction temperature $T_{J(MAX)}$, the junction-to-ambient thermal resistance θ_{JA} , and the ambient temperature T_A . The maximum allowable continuous power dissipation at any ambient temperature is calculated by $P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA}$.
3. The θ_{JA} values given in this table are for comparison with other packages only and cannot be used for design purposes. They do not represent the performance achieved in real-world applications.

Recommended Work Conditions

| Parameter | Min | Max | Unit |
|--|-----|-----|------|
| Input voltage range | 2.5 | 16 | V |
| Operating ambient temperature(T_A) | -40 | 125 | °C |

Note: Exceptional for BL1117-12V, the maximum input voltage for BL1117-12V is 20V.

Electrical Characteristics

T_A=25°C

| Parameter | | Symbol | Conditions | Min | Typ. | Max | Units |
|-------------------|-------------------|--|---|-------|-------|-------|-------|
| Reference voltage | | V _{REF} | BL1117-ADJ 10mA ≤ I _{OUT} ≤ 1A, V _{IN} = 3.25V | 1.225 | 1.25 | 1.275 | V |
| Output voltage | ±1% | V _{OUT} | BL1117-3.3V V _{IN} = 5.3V, I _{OUT} = 10mA | 3.267 | 3.3 | 3.333 | V |
| | ±2% | | | 3.234 | 3.3 | 3.366 | V |
| | ±1% | | BL1117-5.0V V _{IN} = 7V, I _{OUT} = 10mA | 4.95 | 5 | 5.05 | V |
| | ±2% | | | 4.9 | 5 | 5.1 | V |
| Output voltage | V _{OUT} | BL1117-1.2V 0 ≤ I _{OUT} ≤ 1A, V _{IN} = 3.2V | 1.176 | 1.2 | 1.224 | V | |
| | | BL1117-1.5V 0 ≤ I _{OUT} ≤ 1A, V _{IN} = 3.5V | 1.47 | 1.5 | 1.53 | V | |
| | | BL1117-1.8V 0 ≤ I _{OUT} ≤ 1A, V _{IN} = 3.8V | 1.764 | 1.8 | 1.836 | V | |
| | | BL1117-2.5V 0 ≤ I _{OUT} ≤ 1A, V _{IN} = 4.5V | 2.45 | 2.5 | 2.55 | V | |
| | | BL1117-3.3V 0 ≤ I _{OUT} ≤ 1A, V _{IN} = 5.3V | 3.234 | 3.3 | 3.366 | V | |
| | | BL1117-5.0V 0 ≤ I _{OUT} ≤ 1A, V _{IN} = 7.0V | 4.9 | 5 | 5.1 | V | |
| | | BL1117-12.0V 0 ≤ I _{OUT} ≤ 1A, V _{IN} = 14V | 11.76 | 12 | 12.24 | V | |
| Line regulation | ΔV _{OUT} | BL1117-1.2V I _{OUT} = 10mA, 2.7V ≤ V _{IN} ≤ 10V | | 0.1 | 0.2 | %/V | |
| | | BL1117-ADJ I _{OUT} = 10mA, 2.75V ≤ V _{IN} ≤ 12V | | 0.1 | 0.2 | %/V | |
| | | BL1117-1.5V I _{OUT} = 10mA, 3.0V ≤ V _{IN} ≤ 12V | | 0.1 | 0.2 | %/V | |
| | | BL1117-1.8V I _{OUT} = 10mA, 3.3V ≤ V _{IN} ≤ 12V | | 0.1 | 0.2 | %/V | |
| | | BL1117-2.5V I _{OUT} = 10mA, 4.0V ≤ V _{IN} ≤ 12V | | 0.1 | 0.2 | %/V | |
| | | BL1117-3.3V I _{OUT} = 10mA, 4.8V ≤ V _{IN} ≤ 12V | | 0.1 | 0.2 | %/V | |
| | | BL1117-5.0V I _{OUT} = 10mA, 6.5V ≤ V _{IN} ≤ 12V | | 0.1 | 0.2 | %/V | |
| | | BL1117-12.0V I _{OUT} = 10mA, 13.5V ≤ V _{IN} ≤ 20V | | 0.1 | 0.2 | %/V | |

Electrical Characteristics continued

 $T_A=25^{\circ}\text{C}$

| Parameter | Symbol | Conditions | Min | Typ. | Max | Units |
|---------------------|--------------------------|--|-----|-----------|-----|-------------------------|
| Load regulation | ΔV_{OUT} | BL1117-1.2V $V_{IN}=2.7\text{V}, 10\text{mA}\leq I_{OUT}\leq 1\text{A}$ | | 10 | 30 | mV |
| | | BL1117-ADJ $V_{IN}=2.75\text{V}, 10\text{mA}\leq I_{OUT}\leq 1\text{A}$ | | 10 | 30 | mV |
| | | BL1117-1.5V $V_{IN}=3.0\text{V}, 10\text{mA}\leq I_{OUT}\leq 1\text{A}$ | | 10 | 30 | mV |
| | | BL1117-1.8V $V_{IN}=3.3\text{V}, 10\text{mA}\leq I_{OUT}\leq 1\text{A}$ | | 10 | 30 | mV |
| | | BL1117-2.5V $V_{IN}=4.0\text{V}, 10\text{mA}\leq I_{OUT}\leq 1\text{A}$ | | 10 | 30 | mV |
| | | BL1117-3.3V $V_{IN}=4.8\text{V}, 10\text{mA}\leq I_{OUT}\leq 1\text{A}$ | | 10 | 30 | mV |
| | | BL1117-5.0V $V_{IN}=6.5\text{V}, 10\text{mA}\leq I_{OUT}\leq 1\text{A}$ | | 10 | 30 | mV |
| | | BL1117-12.0V $V_{IN}=13.5\text{V}, 10\text{mA}\leq I_{OUT}\leq 1\text{A}$ | | 10 | 30 | mV |
| V_{DROP} | Dropout voltage | $I_{OUT}=100\text{mA}$ | | 1.23 | 1.3 | V |
| | | $I_{OUT}=500\text{mA}$ | | 1.26 | 1.4 | V |
| | | $I_{OUT}=1\text{A}$ | | 1.3 | 1.5 | V |
| I_{LIMIT} | Current limit | $V_{IN}-V_{OUT}=2\text{V}, T_J=25^{\circ}\text{C}$ | 1 | | | A |
| SVR | Supply voltage rejection | $f=120\text{Hz}, V_{IN}-V_{OUT}=3\text{V}+1\text{V}_{P-P}$ | | 60 | | dB |
| I_{MIN} | Minimum load current | BL1117-ADJ | | 2 | 10 | mA |
| I_Q | Quiescent current | BL1117-1.2V, $V_{IN}=10\text{V}$ | | 2 | 5 | mA |
| | | BL1117-1.5V, $V_{IN}=11\text{V}$ | | 2 | 5 | mA |
| | | BL1117-1.8V, $V_{IN}=12\text{V}$ | | 2 | 5 | mA |
| | | BL1117-2.5V, $V_{IN}=12\text{V}$ | | 2 | 5 | mA |
| | | BL1117-3.3V, $V_{IN}=12\text{V}$ | | 2 | 5 | mA |
| | | BL1117-5.0V, $V_{IN}=12\text{V}$ | | 2 | 5 | mA |
| | | BL1117-12.0V, $V_{IN}=20\text{V}$ | | 2 | 5 | mA |
| I_{ADJ} | Adjust pin current | BL1117-ADJ | | 55 | 120 | μA |
| | | $V_{IN}=5\text{V}, 10\text{mA}\leq I_{OUT}\leq 1\text{A}$ | | | | |
| I_{CHANGE} | I_{ADJ} change | BL1117-ADJ | | 0.2 | 10 | μA |
| | | $V_{IN}=5\text{V}, 10\text{mA}\leq I_{OUT}\leq 1\text{A}$ | | | | |
| $\Delta V/\Delta T$ | Temperature coefficient | | | ± 100 | | ppm/ $^{\circ}\text{C}$ |


Note:

- All tests are conducted under ambient temperature 25°C and within a short period of time 20ms.
- Load current smaller than minimum load current of BL1117-ADJ will lead to unstable or oscillation output.


Typical Performance Characteristics

$T_A=25^{\circ}\text{C}$, unless otherwise specified.


Line Regulation

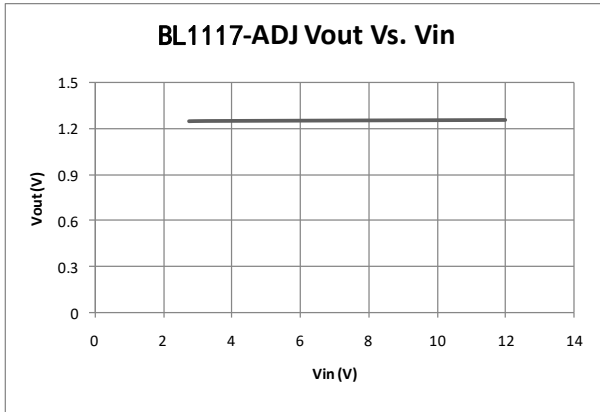


Load Regulation

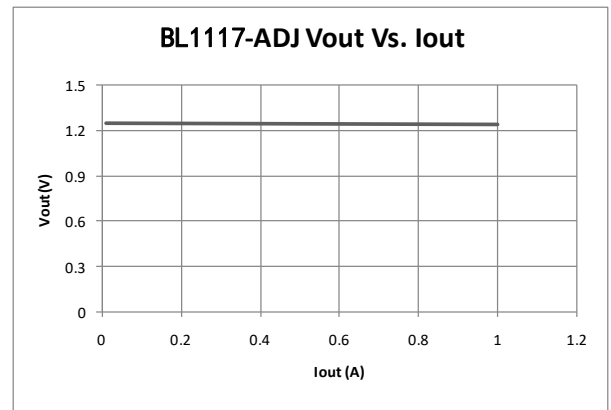


Dropout Voltage

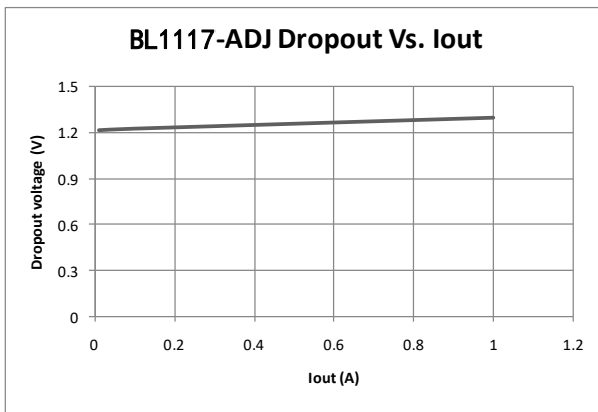

Thermal performance with OTP

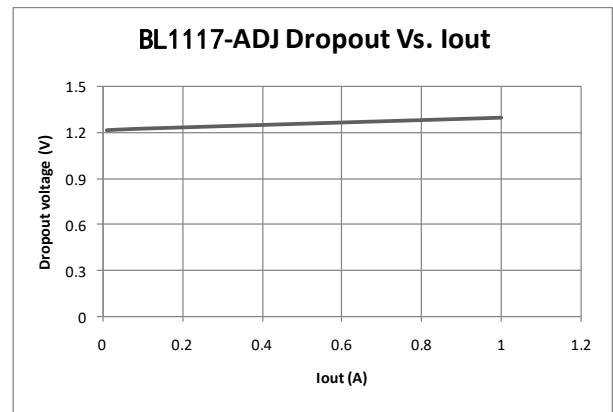


BL1117-ADJ Vout Vs. Temp

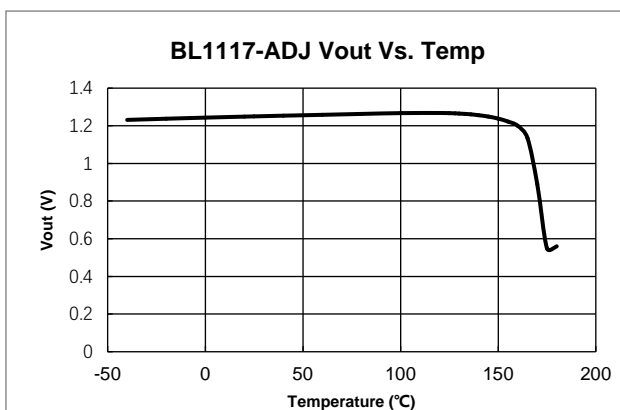


Load Transient Response




Test Condition: $V_{IN}=5V$, $V_{OUT}=3.3V$, $C_{IN}=1\mu F$ (Ceramic), $C_{OUT}=10\mu F$ (Ceramic)

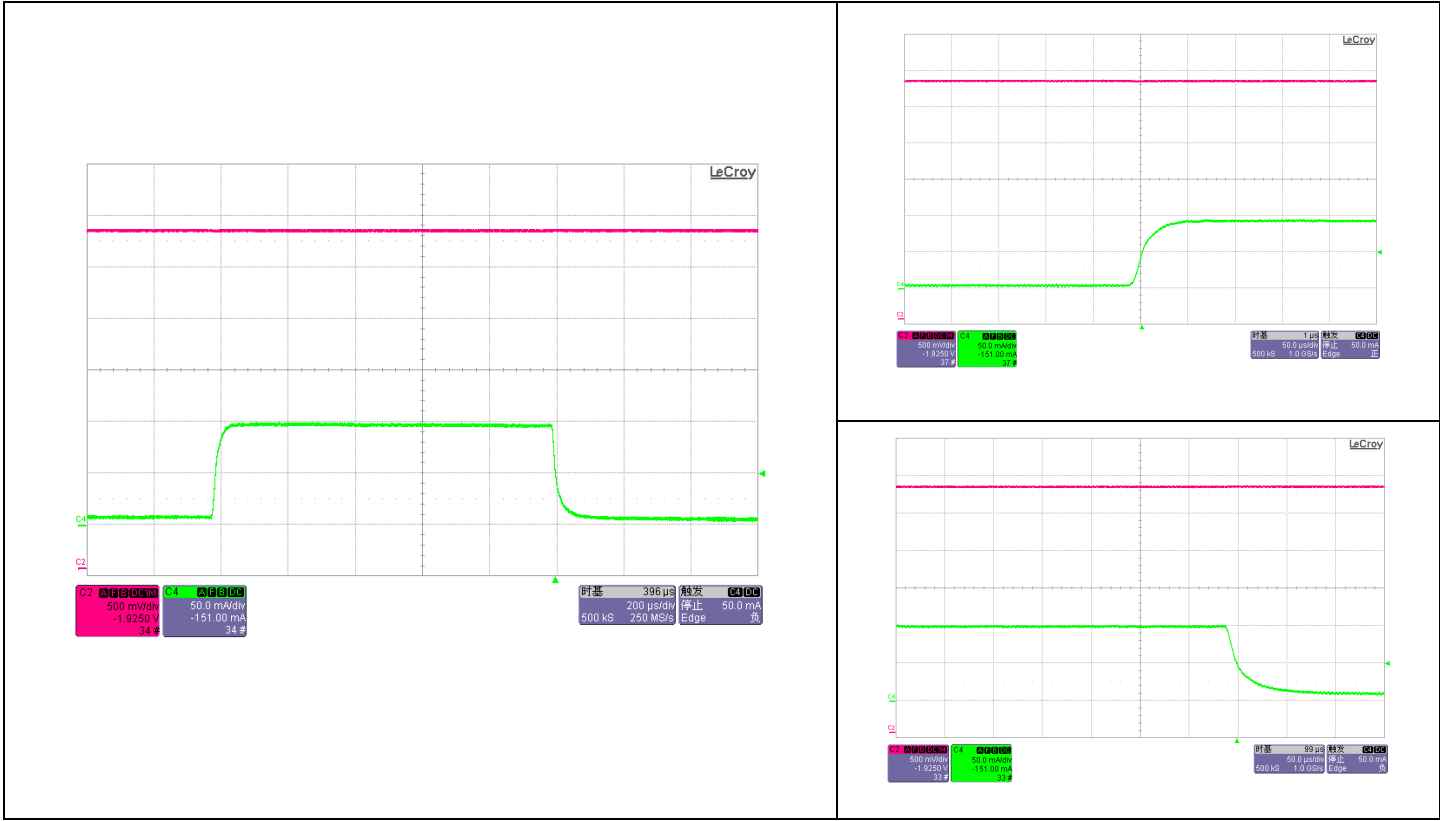




$I_{OUT}=10mA\sim 100mA$, CH2: Output Voltage (500mV/div, DC), CH4: Output Current (50mA/div)

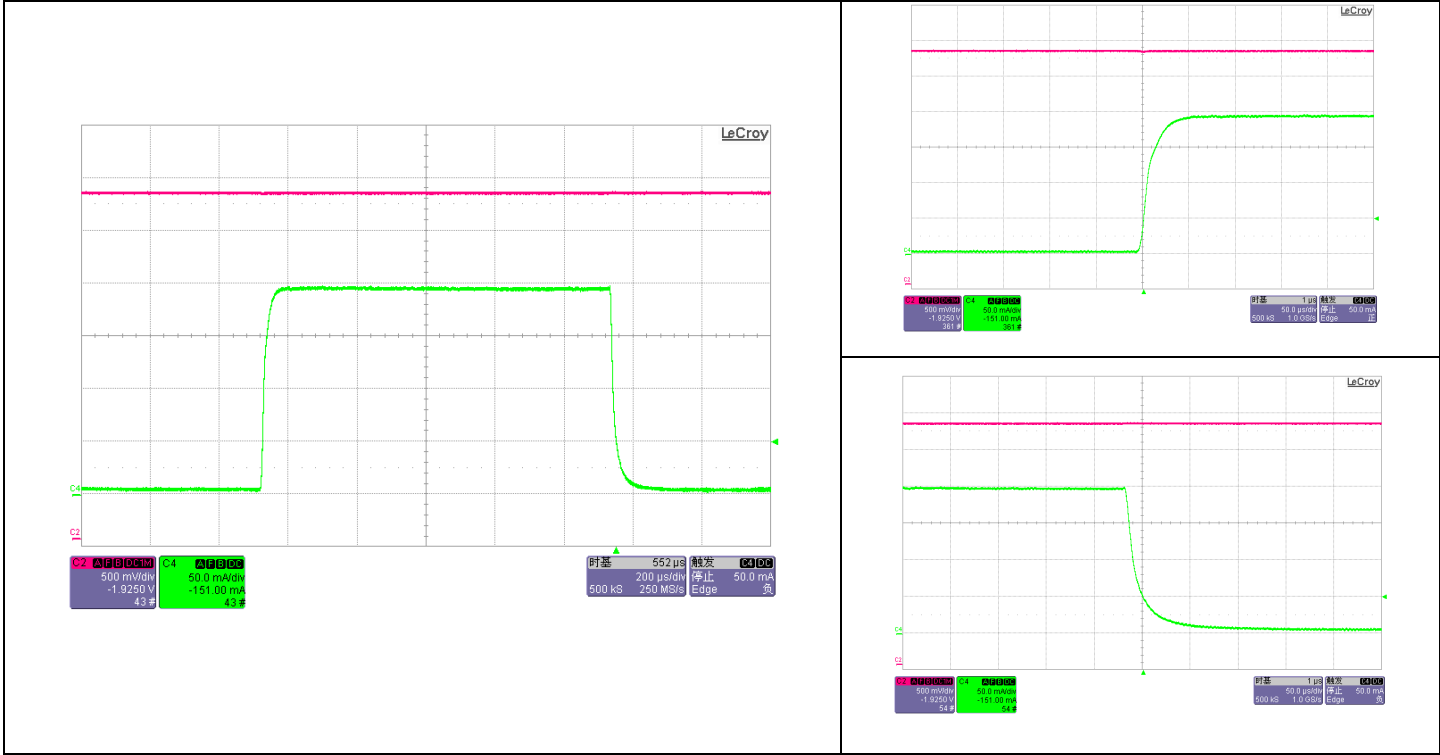

$I_{OUT}=10mA\sim 200mA$, CH2: Output Voltage (500mV/div, DC), CH4: Output Current (50mA/div)

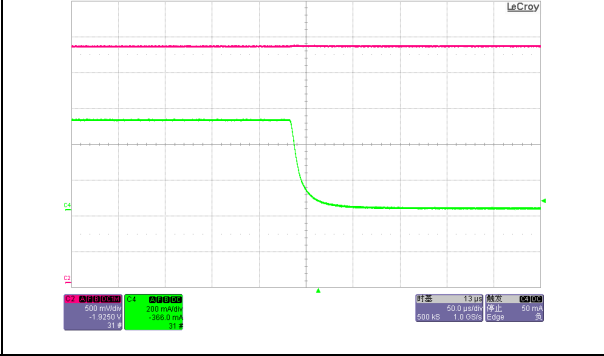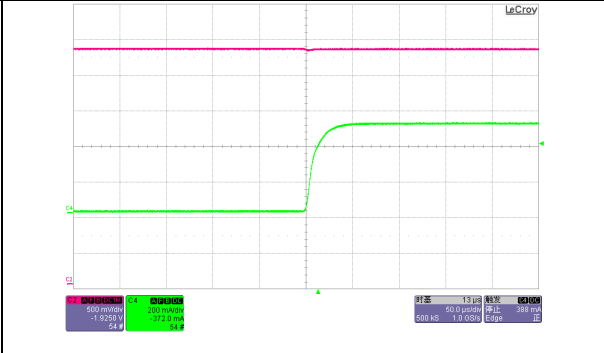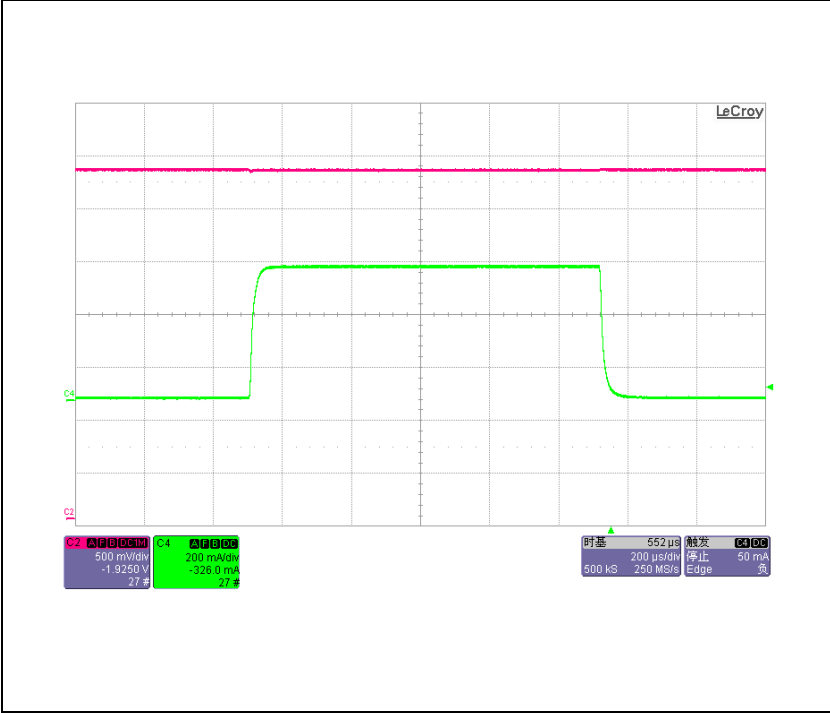


$I_{OUT}=10mA\sim 500mA$, CH2: Output Voltage (500mV/div, DC), CH4: Output Current (200mA/div)

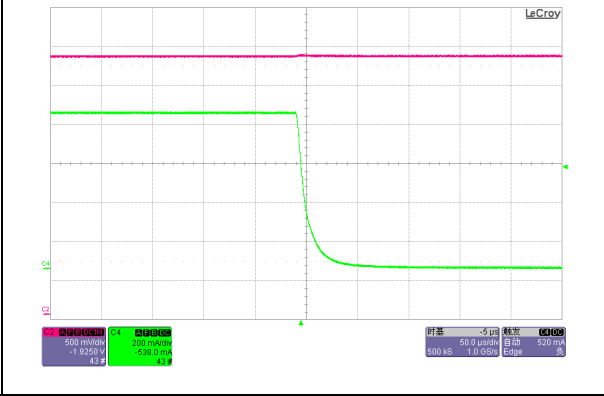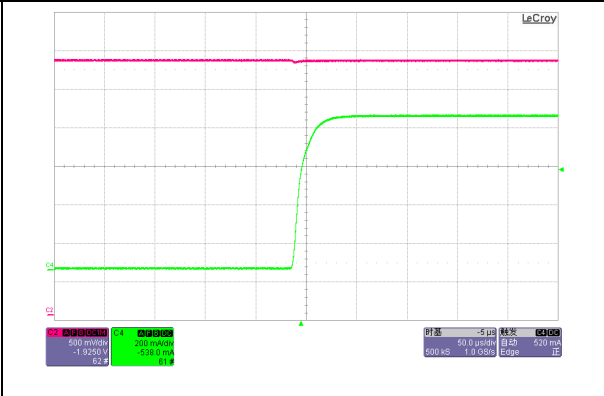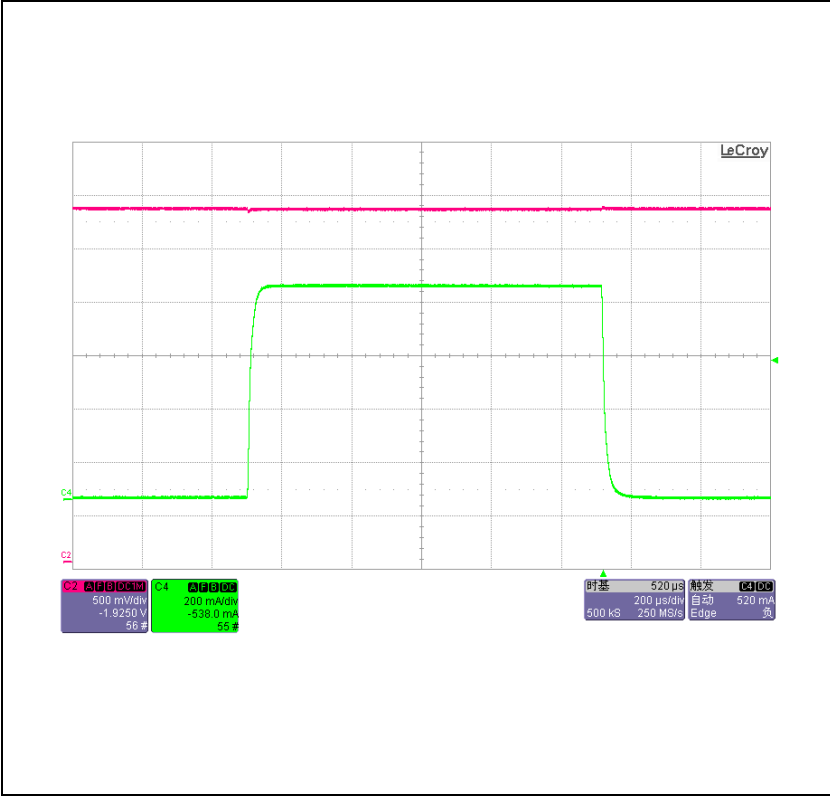


$I_{OUT}=10mA\sim 800mA$, CH2: Output Voltage (500mV/div, DC), CH4: Output Current (200mA/div)

Load Transient Response


Test Condition: $V_{IN}=5V$, $V_{OUT}=ADJ$, $C_{IN}=1\mu F$ (Ceramic), $C_{OUT}=10\mu F$ (Ceramic)

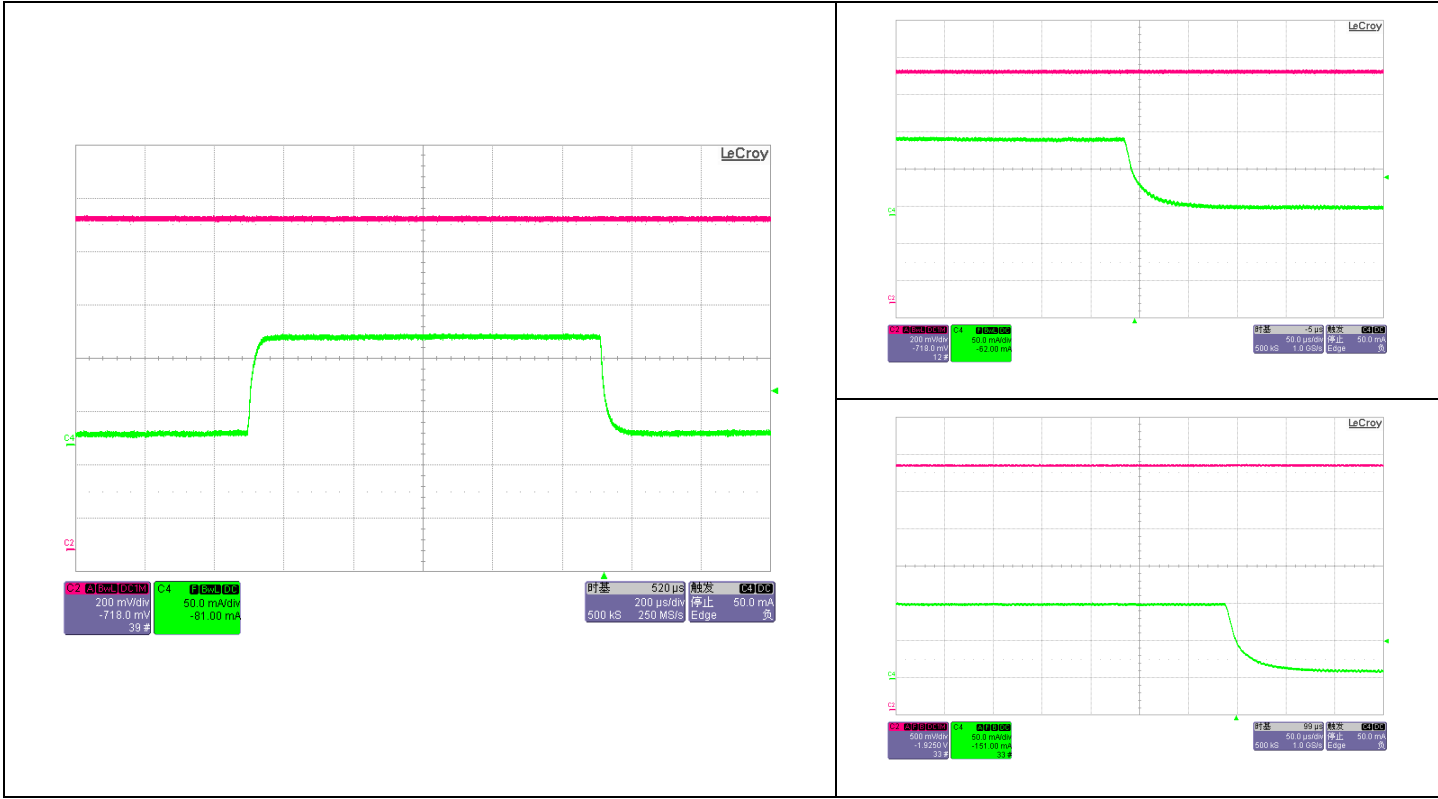


$I_{OUT}=10mA\sim 100mA$, CH2: Output Voltage (200mV/div, DC), CH4: Output Current (50mA/div)

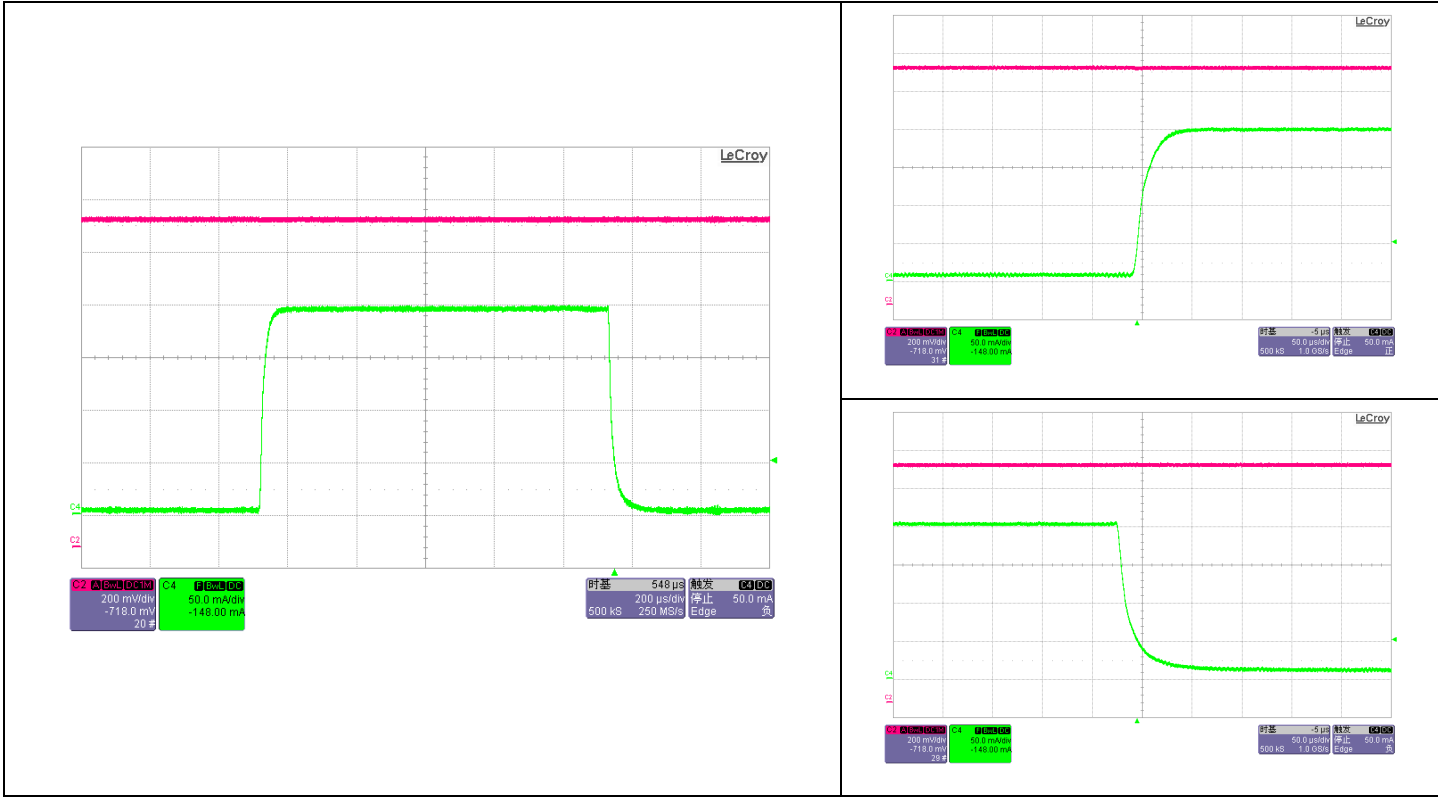

$I_{OUT}=10mA\sim 200mA$, CH2: Output Voltage (200mV/div, DC), CH4: Output Current (50mA/div)

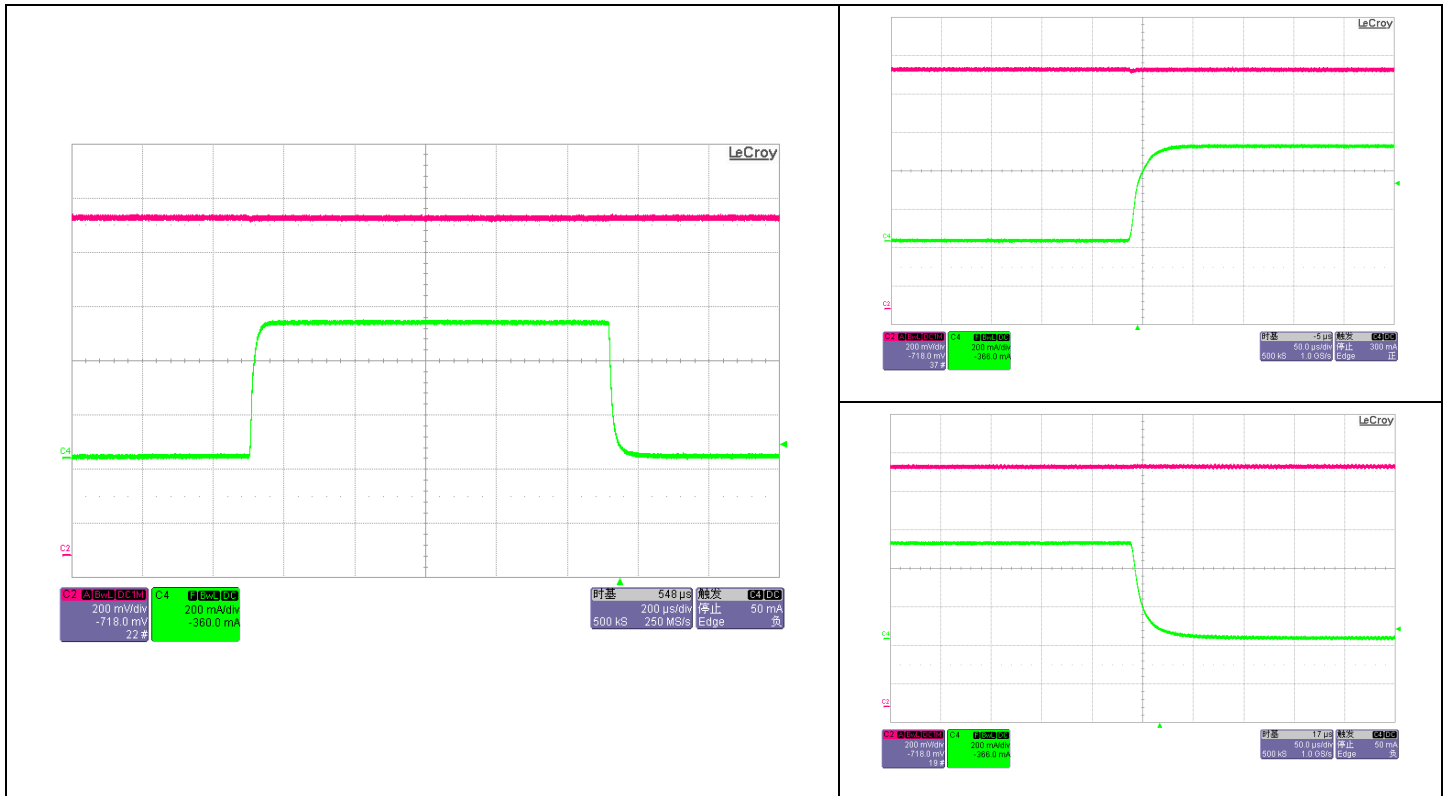

$I_{OUT}=10\text{mA}\sim 500\text{mA}$, CH2: Output Voltage (200mV/div, DC), CH4: Output Current (200mA/div)

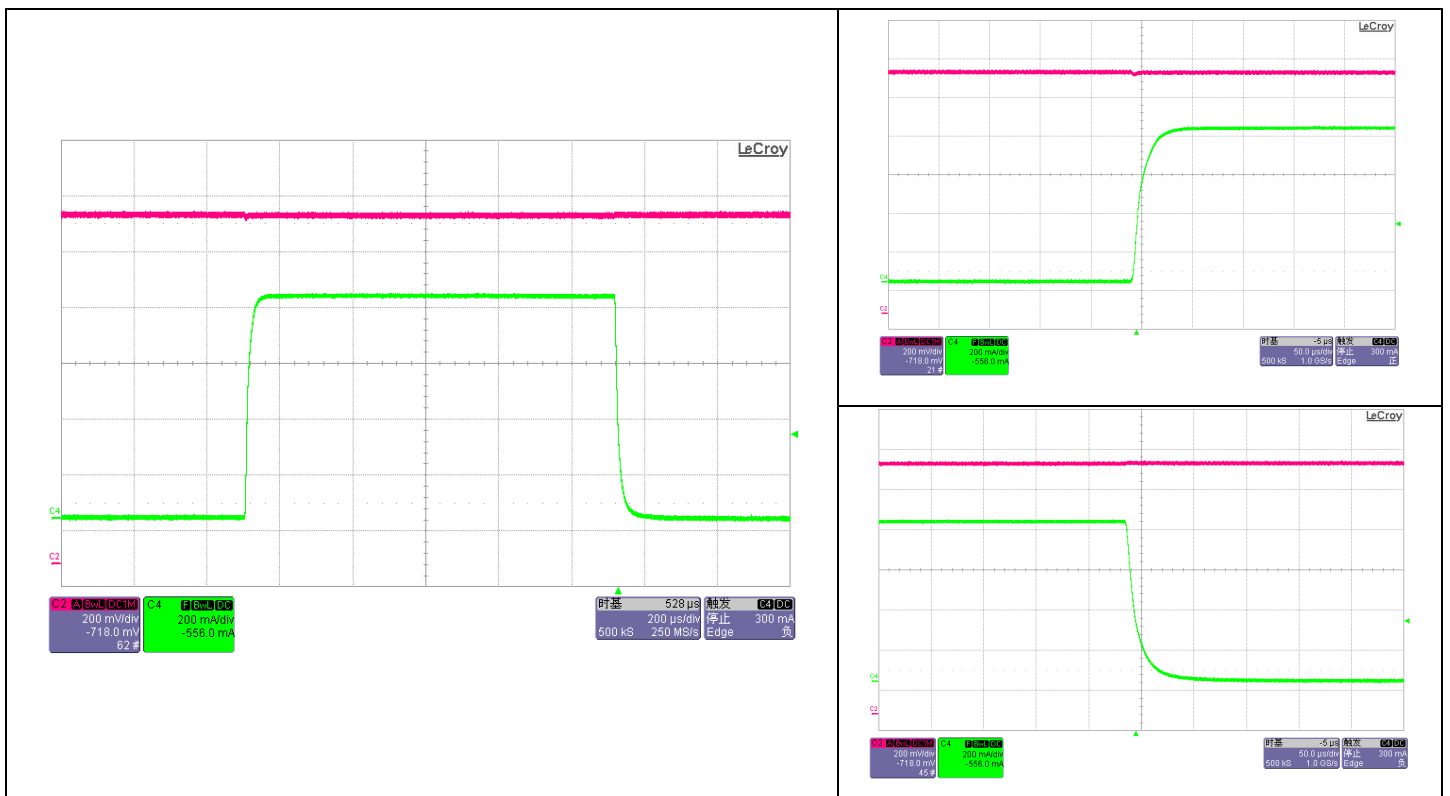

$I_{OUT}=10\text{mA}\sim 800\text{mA}$, CH2: Output Voltage (200mV/div, DC), CH4: Output Current (200mA/div)

Detailed Description

BL1117 is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, current limit, power transistors and its driver circuit and so on.


The thermal shut down modules can assure chip and its application system working safety when the junction temperature is larger than 140°C.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under 100 ppm/°C. And the accuracy of output voltage is guaranteed by trimming technique.

Application Information

BL1117 has an adjustable version and seven fixed versions (1.2V, 1.5V, 1.8V, 2.5V, 3.3V, 5V and 12V).

Fixed Output Voltage Version

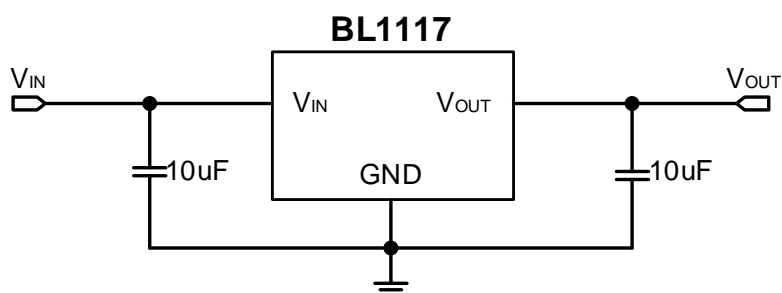


Note:

1. Recommend using 10uF tan capacitor or MLCC capacitor as bypass capacitor (C1) for all application circuit.
2. Recommend using 10uF tan capacitor or MLCC capacitor to assure circuit stability.
3. Capacitor ESR range: 3mΩ~22Ω.

Adjustable Output Voltage Version

BL1117-ADJ provides a 1.25V reference voltage. Any output voltage between 1.25V~12V can be achieved by choosing two external resistors (schematic is shown below), R1 and R2

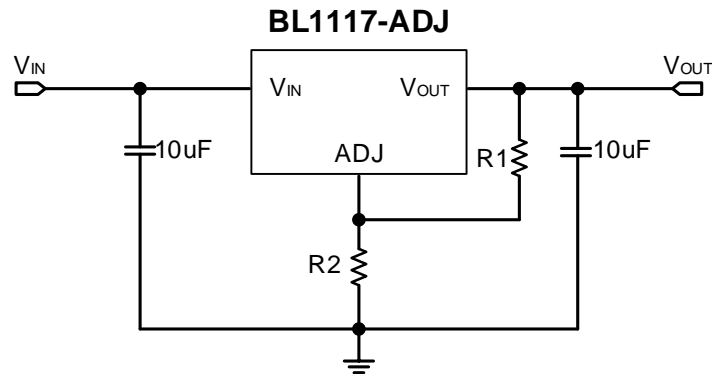

The output voltage of adjustable version follows the equation:

$$V_{OUT} = 1.25 \times \left(1 + \frac{R2}{R1} \right) + I_{ADJ} \times R2$$

We can ignore I_{ADJ} because I_{ADJ} (about 50uA) is much less than the current of R1 (about 2~10mA).

Note:


1. To meet the minimum load current (>10mA) requirement, R1 is recommended to be 125ohm or lower. As BL1117-ADJ can keep itself stable at load current about 2mA, R1 is not allowed to be higher than 625ohm.
2. Using a bypass capacitor (C_{ADJ}) between the ADJ pin and ground can improve ripple rejection. This bypass capacitor prevents ripple from being amplified as the output voltage is increased. The impedance of C_{ADJ} should be less than R1 to prevent ripple from being amplified. As R1 is normally in the range of 100Ω~500Ω, the value of C_{ADJ}

should satisfy this equation: $\frac{1}{2\pi \times f_{ripple} \times C_{ADJ}} < R1$.

Package Information


| Package | SOT223 | | Devices per reel | 3000 pcs |
|----------|-------------|------|------------------|----------|
| | | | | |
| DIM | Millimeters | | Inches | |
| | Min | Max | Min | Max |
| A | 1.48 | 1.8 | 0.0583 | 0.0709 |
| A1 | 0 | 0.15 | 0.0000 | 0.0059 |
| A2 | 0.6 | 0.95 | 0.0236 | 0.0374 |
| A3 | 1.45 | 1.75 | 0.0571 | 0.0689 |
| b | 0.6 | 0.82 | 0.0236 | 0.0323 |
| c | 0.2 | 0.35 | 0.0079 | 0.0138 |
| D | 6.2 | 6.6 | 0.2441 | 0.2598 |
| D1 | 2.9 | 3.1 | 0.1142 | 0.1220 |
| E | 6.7 | 7.3 | 0.2638 | 0.2784 |
| E1 | 3.3 | 3.7 | 0.1299 | 0.1457 |
| e | 2.3(TYP) | | 0.0906(TYP) | |
| L | 0.76 | 1.16 | 0.0299 | 0.0457 |
| L1 | 1.75(TYP) | | 0.0689(TYP) | |
| θ | 0 | 10° | 0.0000 | 10° |
| c1 | 0.25(TYP) | | 0.0098(TYP) | |

| | | | |
|----------------|----------------|-------------------------|-----------------|
| Package | TO252-2 | Devices per reel | 2500 pcs |
|----------------|----------------|-------------------------|-----------------|

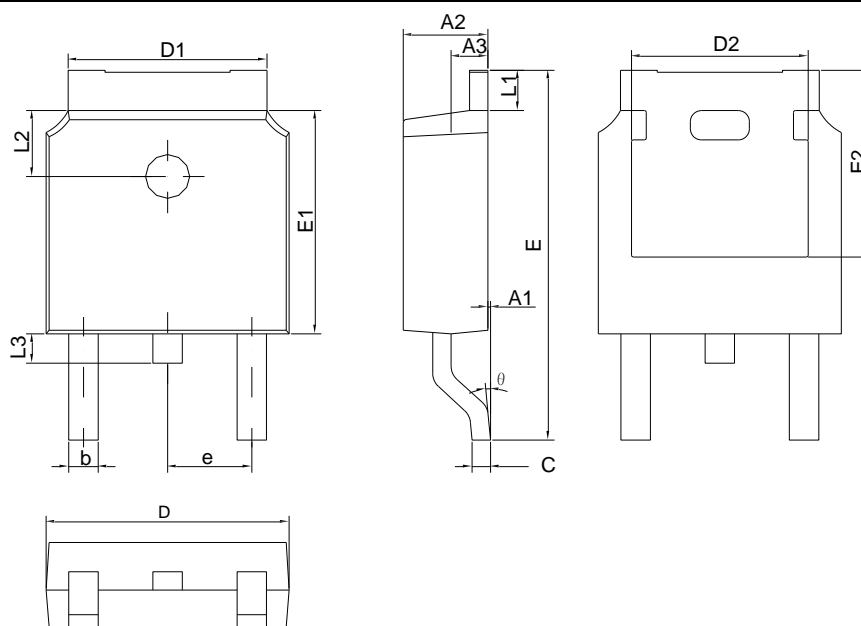


| DIM | Millimeters | | Inches | |
|-----|-------------|-------|----------|--------|
| | Min | Max | Min | Max |
| A1 | 0 | 0.13 | 0 | 0.0051 |
| A2 | 2.18 | 2.39 | 0.0858 | 0.0941 |
| A3 | 0.9 | 1.1 | 0.0354 | 0.0433 |
| b | 0.65 | 0.85 | 0.0256 | 0.0335 |
| c | 0.46 | 0.61 | 0.0181 | 0.0240 |
| D | 6.35 | 6.73 | 0.2500 | 0.2650 |
| D1 | 4.95 | 5.46 | 0.1949 | 0.2150 |
| D2 | 4.7 | 4.9 | 0.1850 | 0.1929 |
| E | 9.4 | 10.41 | 0.3701 | 0.4098 |
| E1 | 5.97 | 6.22 | 0.2350 | 0.2449 |
| E2 | 5.21 | 5.4 | 0.2051 | 0.2126 |
| e | 2.286BSC | | 0.090BSC | |
| L1 | 0.89 | 1.27 | 0.0350 | 0.0500 |
| L2 | 1.7 | 1.9 | 0.0669 | 0.0748 |
| L3 | 0.6 | 1 | 0.0236 | 0.0394 |
| θ | 0 | 8° | 0 | 8° |

| | | | |
|----------------|----------------|-------------------------|-----------------|
| Package | TO252-2 | Devices per reel | 2500 pcs |
|----------------|----------------|-------------------------|-----------------|

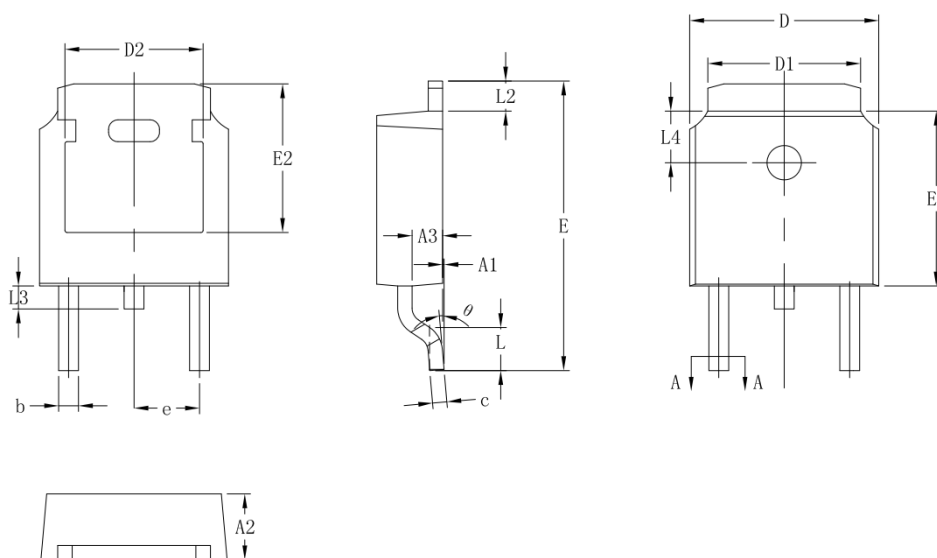

| DIM | Millimeters | | Inches | |
|----------|-------------|------|------------|--------|
| | Min | Max | Min | Max |
| A1 | 0 | 0.1 | 0 | 0.0039 |
| A2 | 2.2 | 2.4 | 0.0866 | 0.0945 |
| A3 | 1.02 | 1.12 | 0.0402 | 0.0441 |
| b | 0.65 | 0.77 | 0.0256 | 0.0303 |
| c | 0.51 | 0.55 | 0.0201 | 0.0217 |
| D | 6.5 | 6.7 | 0.2559 | 0.2638 |
| D1 | 5.33 REF | | 0.2098 REF | |
| D2 | 4.83 REF | | 0.1902 REF | |
| E | 9.9 | 10.3 | 0.3898 | 0.4055 |
| E1 | 6 | 6.2 | 0.2362 | 0.2441 |
| E2 | 5.3 REF | | 0.2087 REF | |
| e | 2.286 BSC | | 0.0900 BSC | |
| L | 1.4 | 1.6 | 0.0551 | 0.0630 |
| L2 | 0.9 | 1.25 | 0.0354 | 0.0492 |
| L3 | 0.6 | 1 | 0.0236 | 0.0394 |
| L4 | 1.7 | 1.9 | 0.0669 | 0.0748 |
| θ | 0 | 8° | 0 | 8° |

| | | | |
|---------|---------|------------------|----------|
| Package | TO252-2 | Devices per reel | 2500 pcs |
|---------|---------|------------------|----------|

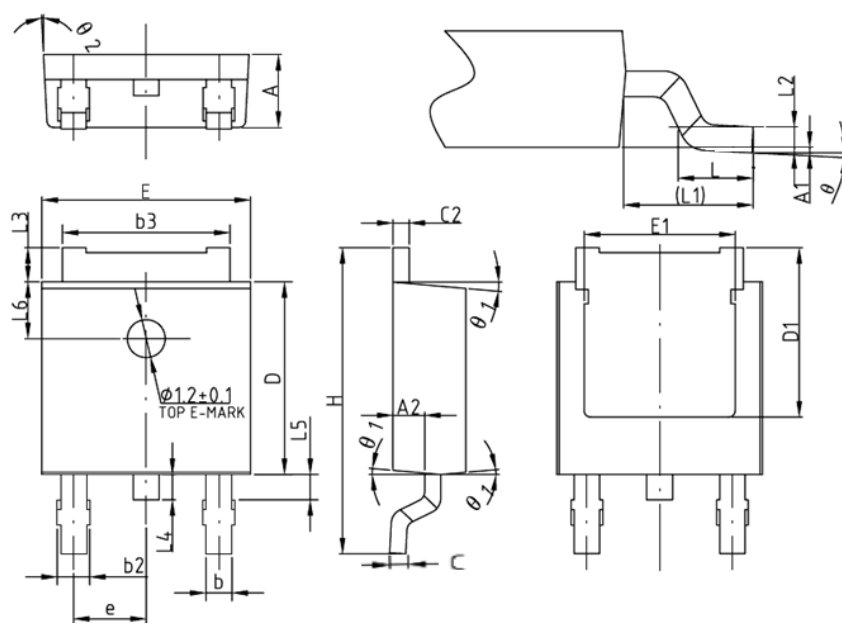

| DIM | Millimeters | | Inches | |
|-----|-------------|------|------------|--------|
| | Min | Max | Min | Max |
| A | 2.2 | 2.38 | 0.0866 | 0.0937 |
| A1 | 0 | 0.1 | 0.0000 | 0.0039 |
| A2 | 0.9 | 1.1 | 0.0354 | 0.0433 |
| b | 0.77 | 0.89 | 0.0303 | 0.0350 |
| b2 | 0.77 | 1.1 | 0.0303 | 0.0433 |
| b3 | 5.23 | 5.43 | 0.2059 | 0.2138 |
| c | 0.47 | 0.6 | 0.0185 | 0.0236 |
| c2 | 0.47 | 0.6 | 0.0185 | 0.0236 |
| D | 6 | 6.2 | 0.2362 | 0.2441 |
| D1 | 5.25 | - | 0.2067 | - |
| E | 6.5 | 6.7 | 0.2559 | 0.2638 |
| E1 | 4.7 | - | 0.1850 | - |
| e | 2.28 BSC | | 0.0898 BSC | |
| H | 9.8 | 10.4 | 0.3858 | 0.4094 |
| L | 1.4 | 1.7 | 0.0551 | 0.0669 |
| L1 | 2.9 REF | | 0.1142 REF | |
| L2 | 0.51 BSC | | 0.0201 BSC | |
| L3 | 0.9 | 1.25 | 0.0354 | 0.0492 |
| L4 | 0.6 | 1 | 0.0236 | 0.0394 |
| L5 | 0.9 | 1.5 | 0.0354 | 0.0591 |
| L6 | 1.8 REF | | 0.0709 REF | |
| θ | 0 | 8° | 0 | 8° |
| θ1 | 3° | 7° | 3° | 7° |
| θ2 | 1° | 5° | 1° | 5° |