

1. Description

➤ Advantages

BLQG3043 is obtained by advanced ignition IGBTs technology which reduce the conduction loss, enhance the SCIS capability. Internally integrated diodes can provide the voltage clamping without the need for external components. The IGBT is suitable device for automotive ignition circuits, specifically as a coil driver.

➤ Key Characteristics


Parameter	Value	Unit
$V_{CES.Type}$	430	V
$V_{CE(sat).Type}$	1.25	V
$E_{SCIS}@T_J=25\text{ }^{\circ}\text{C}$	300	mJ
ESD	4	kV

➤ Features

- Low V_{CEsat}
- High SCIS Energy
- Logic Level Gate Drive
- AEC-Q101 Qualified



➤ Applications

- Automotive ignition Coil Driver Circuits
- Coil-On Plug Application

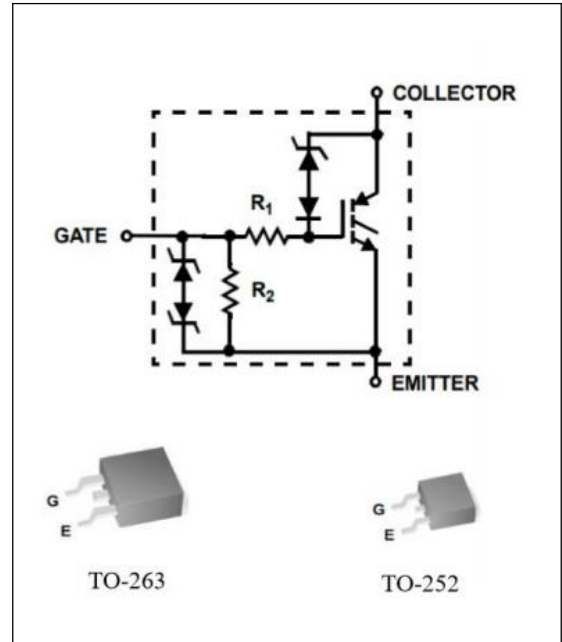

➤ Ordering Informations

Ordering Codes	Package	Product Code	Packing
BLQG3043-D	TO-252	QG3043	Tape Reel
BLQG3043-B	TO-263		Tape Reel

BLQG3043-B,D  (1) BLQG3043:430V 300mJ (2) B:TO-263 D:TO-252	 XXXX: Product Code YYWW: Year & Week ZZ: Assembly Code SSSSS: Lot Code
---	--

2. Absolute Ratings

at $T_C = 25^\circ\text{C}$, unless otherwise specified

Symbol	Parameter	Rating	Units
V_{CES}	Collector-Emitter Voltage ($I_C=2\text{mA}$, $R_G=1\text{k}\Omega$)	BV_{CER}	V
V_{ECS}	Emitter to Collector Voltage ($I_C=10\text{mA}$)	24	V
E_{SCIS}	SCIS Energy@ $T_J=25^\circ\text{C}$, $I_{SCIS}=14.2\text{A}$, $L=3\text{mH}$, $R_G=1\text{k}\Omega$	300	mJ
	SCIS Energy@ $T_J=150^\circ\text{C}$, $I_{SCIS}=10.6\text{A}$, $L=3\text{mH}$, $R_G=1\text{k}\Omega$	170	mJ
I_C	Collector Current @ $T_C=25^\circ\text{C}$	21	A
	Collector Current @ $T_C=100^\circ\text{C}$	17	A
ESD	Electrostatic Discharge Voltage (HBM) at 100pF, 1500 Ω	4	kV
V_{GEM}	Gate- Emitter Voltage Continuous	± 10	V
P_D	Power Dissipation @ $T_C = 25^\circ\text{C}$	150	W
T_J, T_{stg}	Operating Junction and Storage Temperature Range	175, -40 to 175	$^\circ\text{C}$
T_L	Maximum Temperature for Soldering	260	$^\circ\text{C}$

3. Thermal Characteristics

Symbol	Parameter	Package	RATINGS	Units
$R_{\theta JC}$	Junction-to-Case	TO-252/TO-263	1.0	$^\circ\text{C} / \text{W}$

4. Electrical Characteristics

at $T_C = 25^\circ\text{C}$, unless otherwise specified

OFF Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
BV_{CER}	Collector to Emitter Breakdown Voltage	$V_{GE}=0\text{V}$, $I_C=2\text{mA}$, $R_G=1\text{k}\Omega$	410	430	450	V
BV_{CES}	Collector to Emitter Breakdown Voltage	$V_{GE}=0\text{V}$, $I_C=10\text{mA}$, $R_G=0\Omega$	425	440	470	V
BV_{ECS}	Emitter to Collector Breakdown Voltage	$V_{GE}=0\text{V}$, $I_C=-75\text{mA}$	30	--	--	V
BV_{GES}	Gate to Emitter Breakdown Voltage	$I_{GES}=\pm 2\text{mA}$	± 12	± 14	--	V
I_{CER}	Collector to Emitter Leakage Current	$V_{CE}=250\text{V}$, $R_G=1\text{k}\Omega$, $T_J=25^\circ\text{C}$	--	--	25	μA
		$V_{CE}=250\text{V}$, $R_G=1\text{k}\Omega$, $T_J=150^\circ\text{C}$	--	--	1	mA
I_{ECS}	Emitter to Collector Leakage Current	$V_{EC}=24\text{V}$, $T_J=25^\circ\text{C}$	--	--	1	mA
		$V_{EC}=24\text{V}$, $T_J=150^\circ\text{C}$	--	--	40	mA

R_1	Series Gate Resistance		--	70	--	Ω
R_2	Gate to Emitter Resistance		10	--	26	k Ω

ON Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$V_{GE}=4V, I_C=6A, T_J=25^\circ C$	--	1.20	1.60	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$V_{GE}=4.5V, I_C=10A, T_J=175^\circ C$	--	1.52	1.80	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$V_{GE}=4.5V, I_C=15A, T_J=175^\circ C$	--	1.90	2.20	V
$V_{GE(TH)}$	Gate Threshold Voltage	$V_{CE} = V_{GE}, I_C = 1mA$	1.30	--	2.20	V

Pulse width $tp \leq 300\mu s$, $\delta \leq 2\%$

Dynamic Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
C_{iss}	Input Capacitance	$V_{GE} = 0V$ $V_{CE} = 25V$ $f=1.0MHz$	--	1250	--	pF
C_{oss}	Output Capacitance		--	69	--	
C_{rss}	Reverse Transfer Capacitance		--	15	--	
Q_g	Total Gate Charge	$I_C=10A, V_{CE}=12V, V_{GE}=5V$	--	7.2	--	nC

Switching Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$t_{d(ON)}$	Turn-on Delay Time	$V_{CE} = 14V, R_L=1\Omega,$ $V_{GE} = 5V, R_G = 1k\Omega,$ $T_J=25^\circ C$	--	0.85	4	μs
t_r	Rise Time		--	2.50	7	
$t_{d(OFF)}$	Turn-Off Delay Time	$V_{CE} = 300V, L=500\mu H,$ $V_{GE} = 5V, R_G = 1k\Omega,$ $T_J=25^\circ C$	--	4.40	15	
t_f	Fall Time		--	1.90	15	

5. Characteristics Curves

Figure 1 Collector-Emitter Saturation Voltage vs Junction Temperature

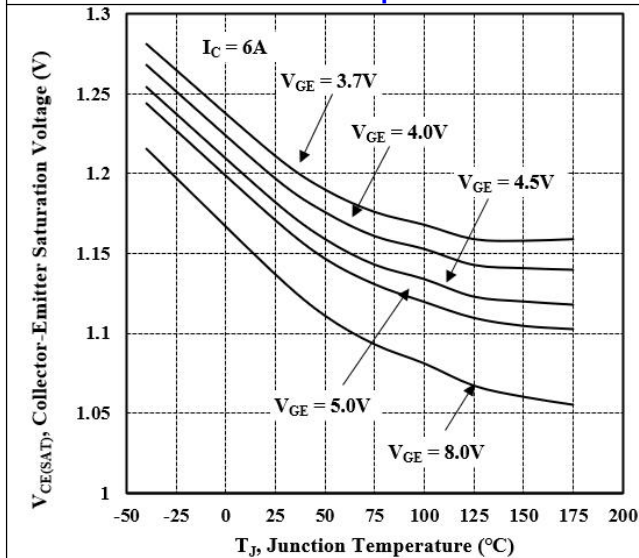


Figure 2 Collector-Emitter Saturation Voltage vs Junction Temperature

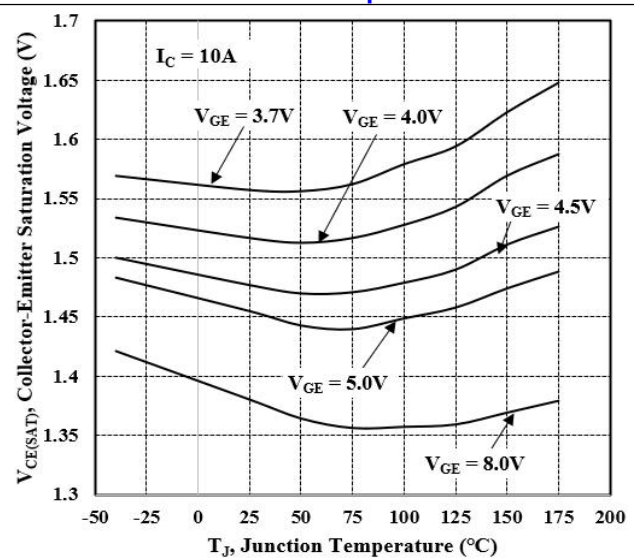


Figure 3 Self Clamped Inductive Switching Current vs Inductance

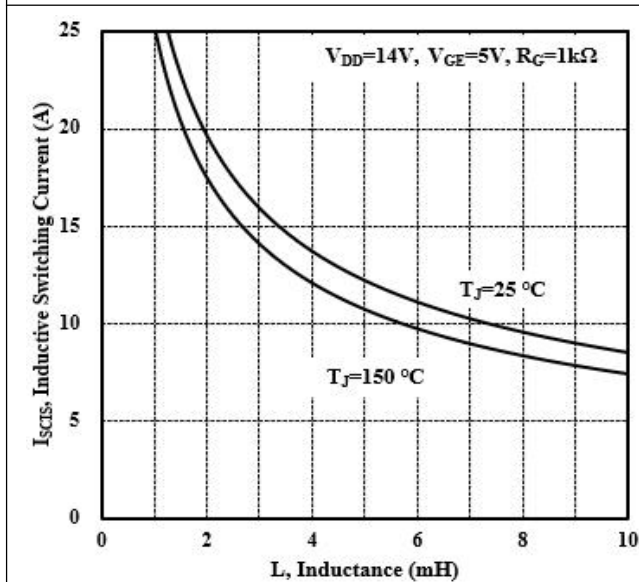


Figure 4 Self Clamped Inductive Switching Current vs Inductance

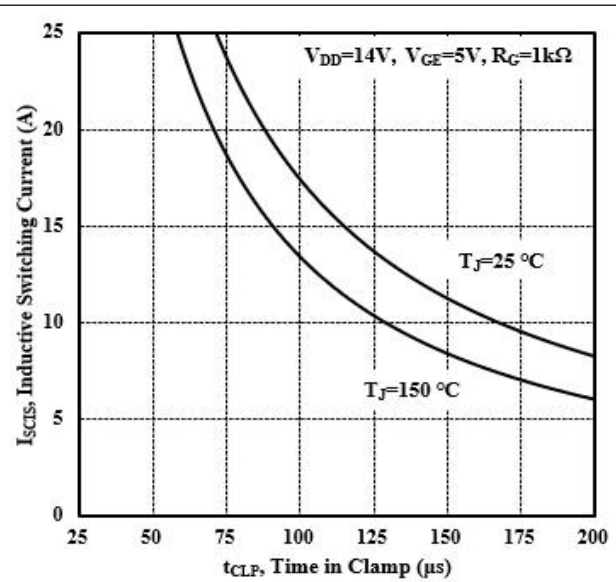


Figure 5 Power Dissipation vs Case Temperature

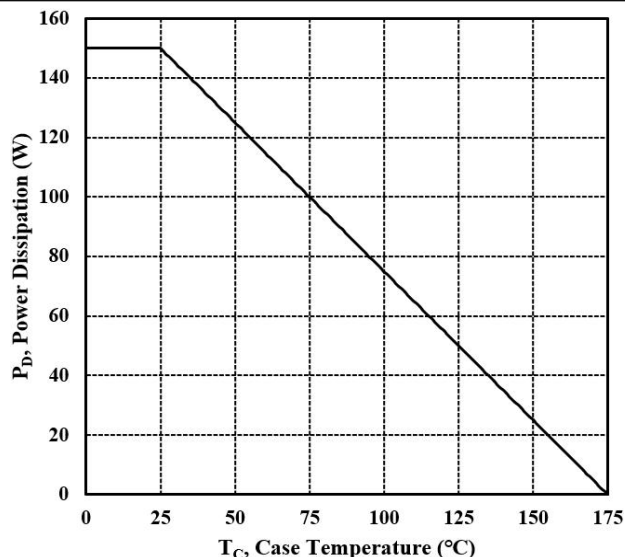


Figure 6. DC Collector Current vs Case Temperature

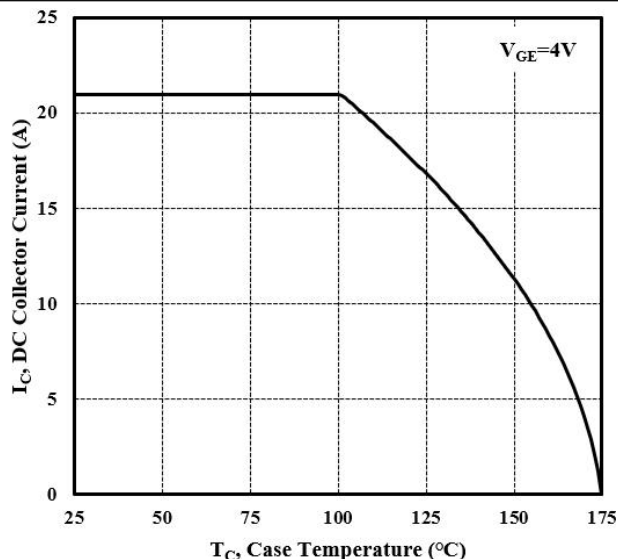


Figure 7 Threshold Voltage vs Junction Temperature

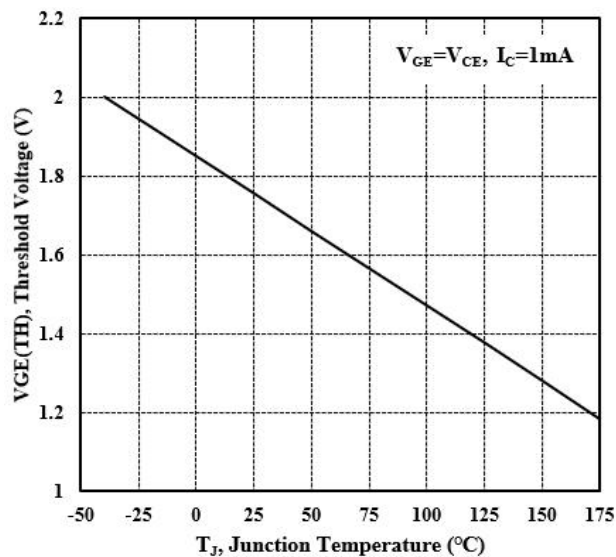


Figure 8 Breakdown Voltage vs Series Gate Resistance

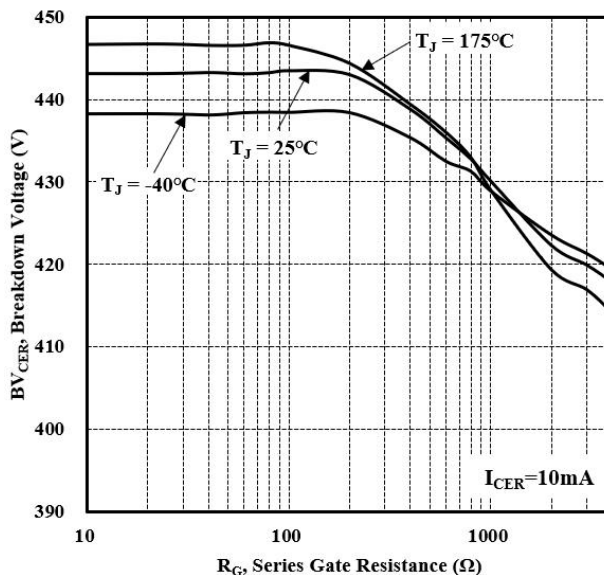


Figure 9 Leakage Current vs Junction Temperature

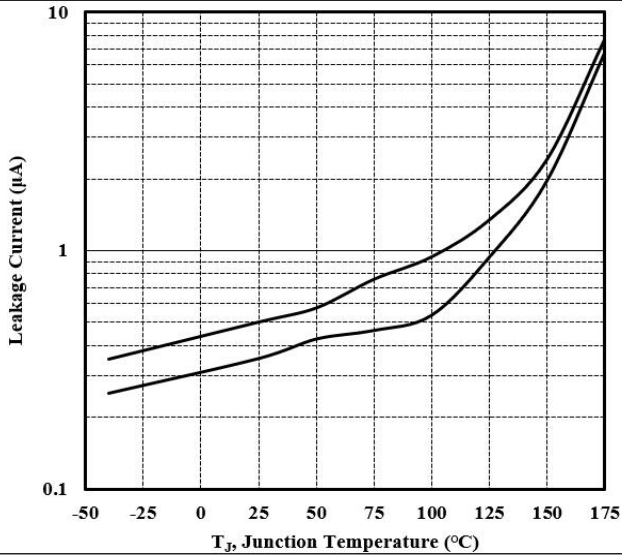


Figure 10 Collector-Emitter Voltage vs Collector Current

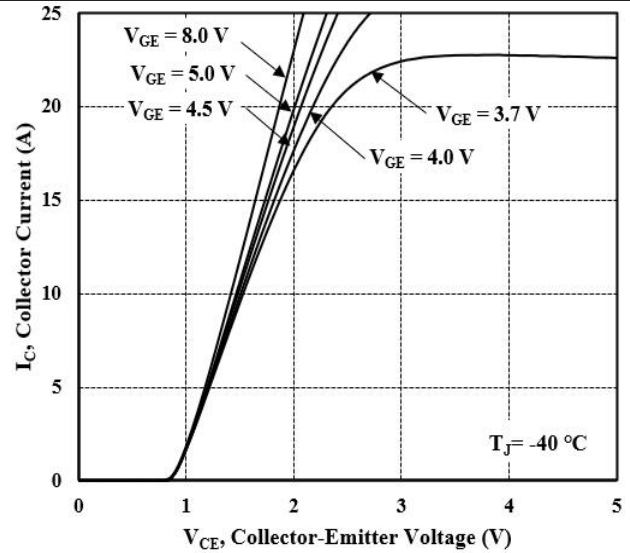


Figure 11 Collector-Emitter Voltage vs Collector Current

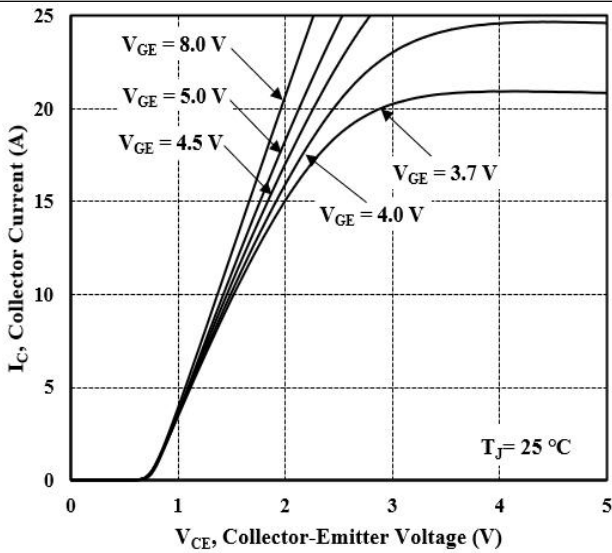


Figure 12 Collector-Emitter Voltage vs Collector Current

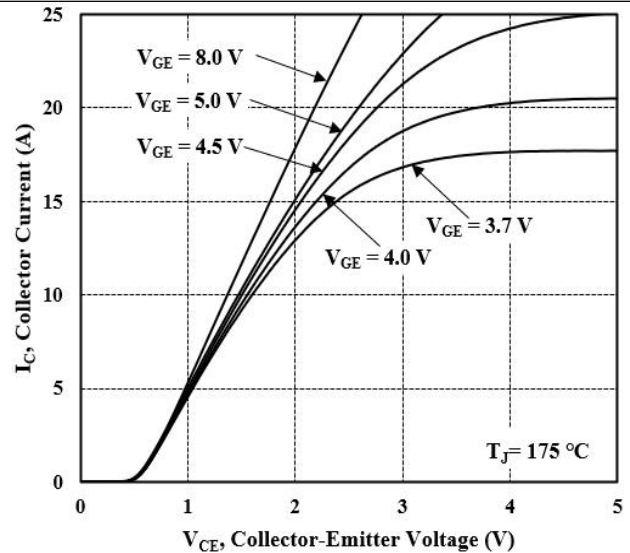


Figure 13 Transfer Characteristics

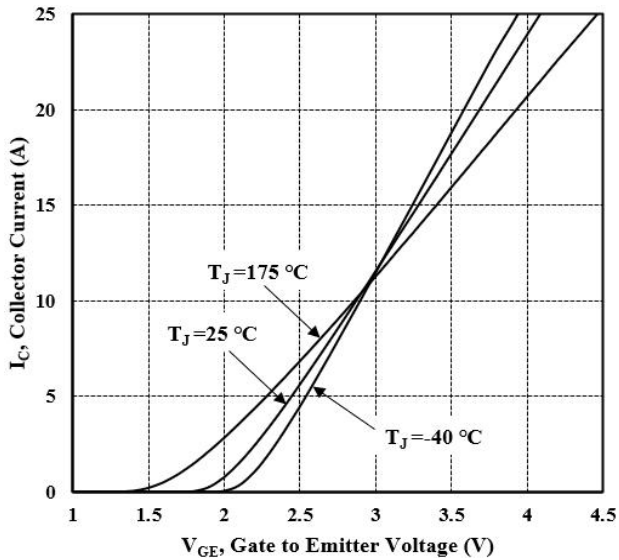


Figure 14 Capacitance vs Collector to Emitter Voltage

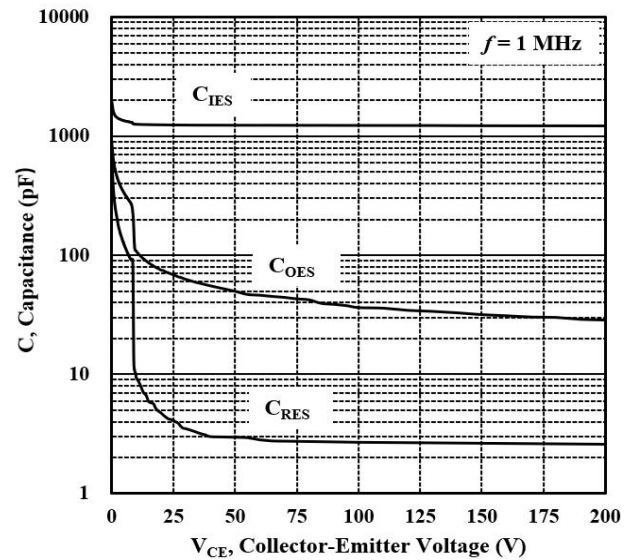


Figure 15 Gate Charge vs Gate to Emitter Voltage

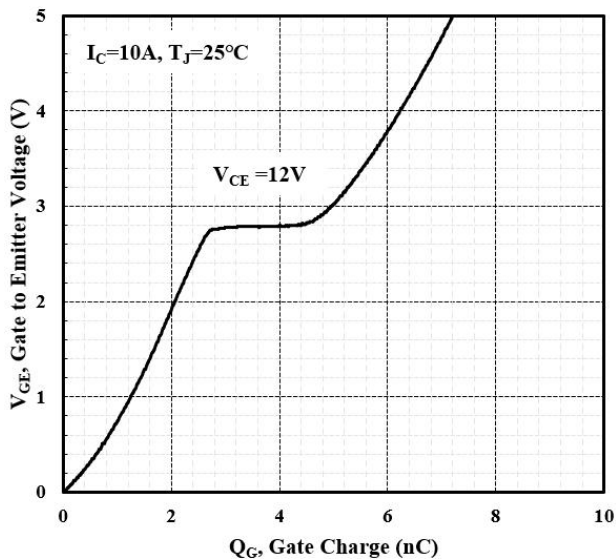


Figure 16 Switching Time vs Junction Temperature


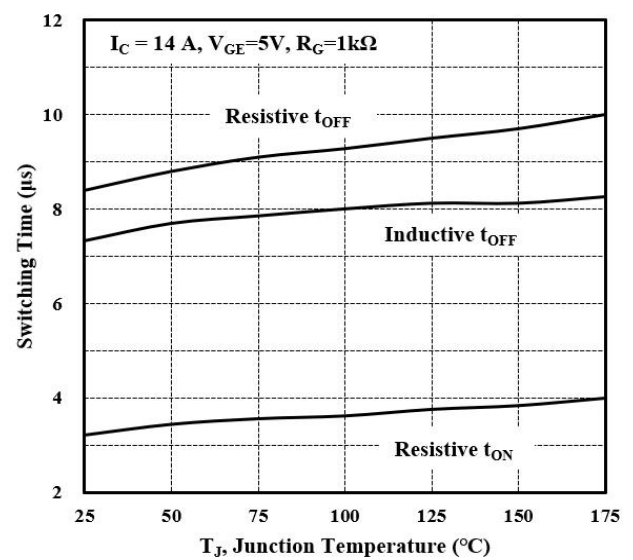


Figure 17 Transient Thermal Impedance, Junction to Case

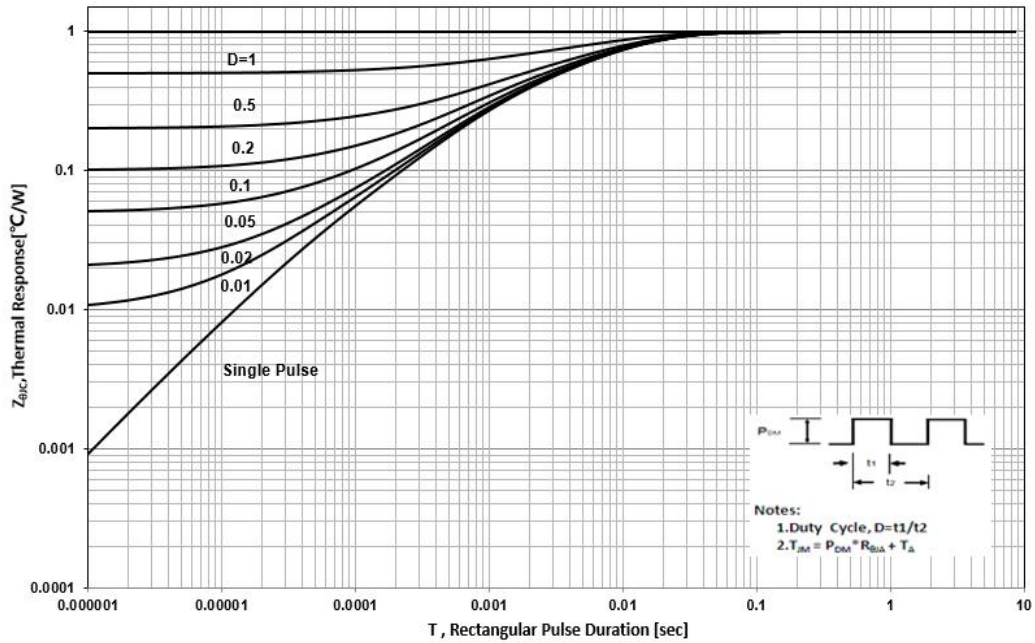

6. Test Circuit and Waveform

Figure 18 Inductive Switching Test Circuit

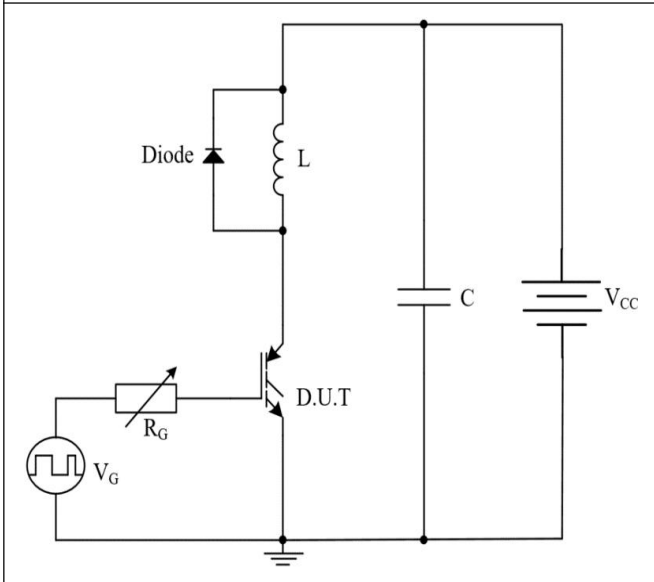


Figure 19 Resistive Switching Test Circuit

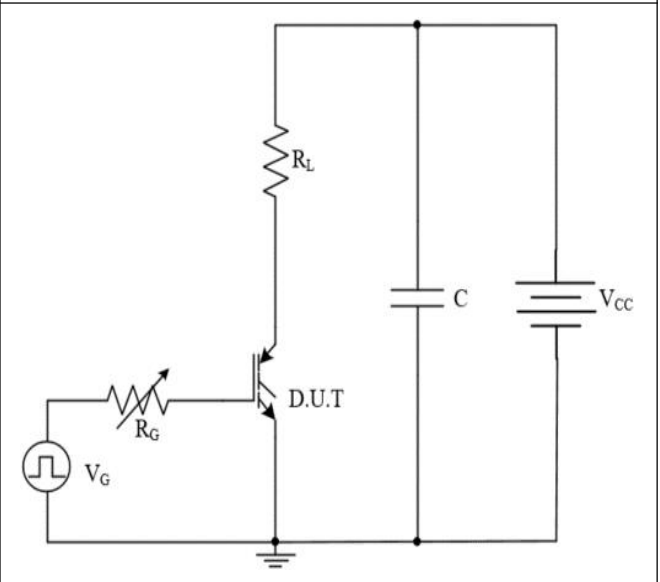


Figure 20 Switching Waveforms

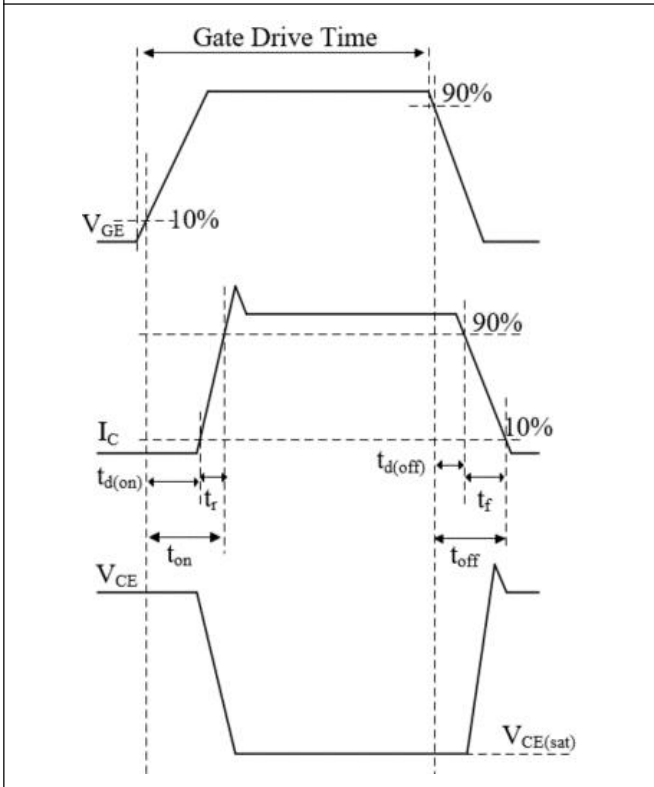


Figure 21 Self Clamped Inductive Switching Circuit



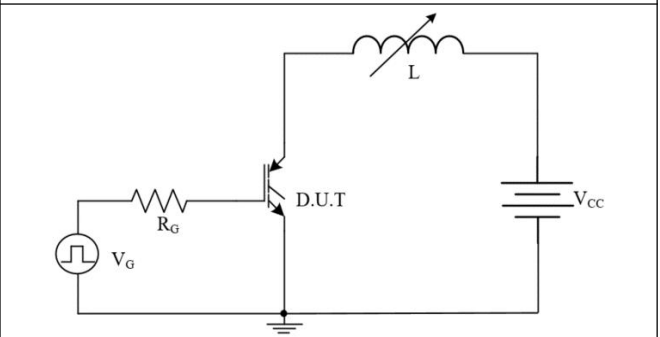


Figure 22 Self Clamped Inductive Switching Waveform



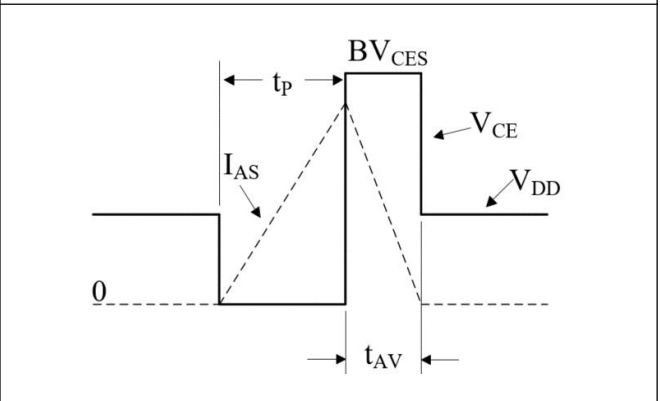


7. Package Description

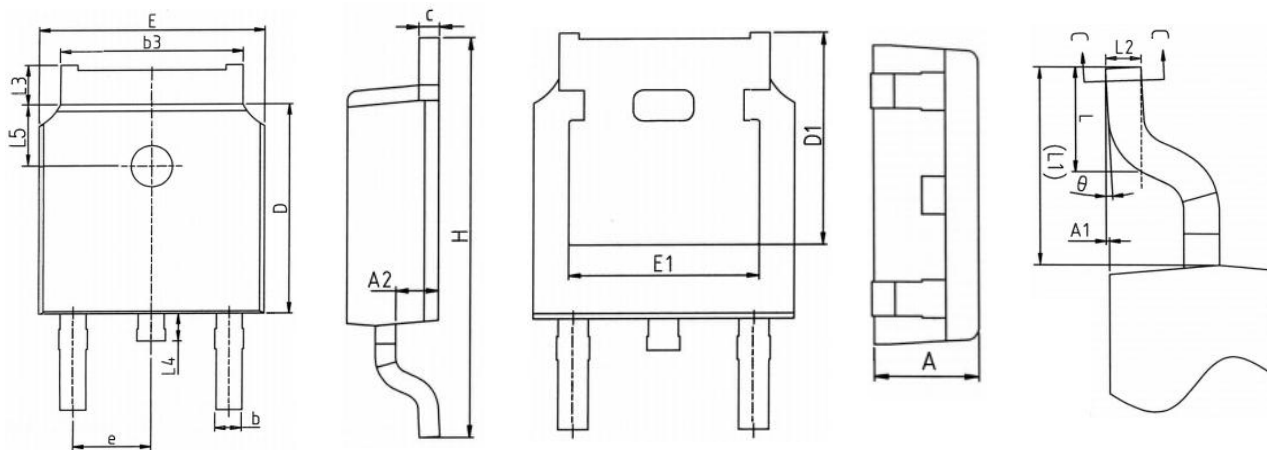

TO-252 Package

SYMBOL	Values(mm)		
	MIN	NOM	MAX
A	2.20	2.30	2.38
A1	0.00	-	0.12
A2	0.97	1.07	1.17
b	0.68	0.78	0.90
b3	5.20	5.33	5.46
c	0.43	0.53	0.61
D	5.98	6.10	6.22
D1	5.30REF		
E	6.40	6.60	6.73
E1	4.63	-	-
e	2.286BSC		
H	9.40	10.10	10.50
L	1.38	1.50	1.75
L1	2.90REF		
L2	0.51BSC		
L3	0.88	-	1.28
L4	0.50	-	1.00
L5	1.65	1.80	1.95
θ	0°	-	8°

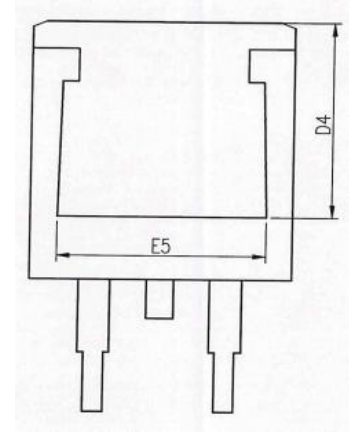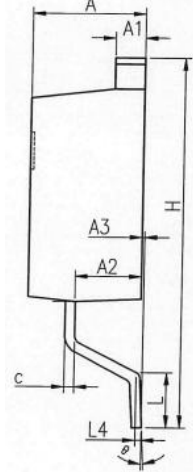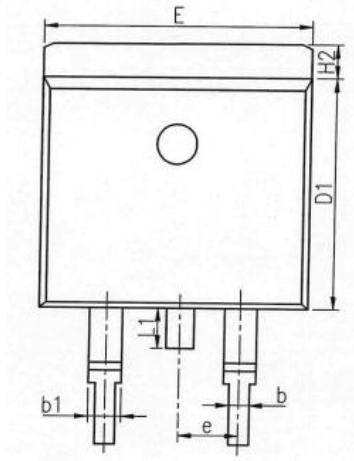

TO-263 Package

Items	Values (mm)		
	MIN	NOM	MAX
A	4.37	4.57	4.77
A1	1.22	1.27	1.42
A2	2.49	2.69	2.89
A3	0.00	0.13	0.25
b	0.70	0.81	0.96
b1	1.17	1.27	1.47
c	0.30	0.38	0.53
D1	8.50	8.70	8.90
D4	6.60	-	-
E	9.86	10.16	10.36
E5	7.06	-	-
e	2.54 BSC		
H	14.70	15.10	15.50
H2	1.07	1.27	1.47
L	2.00	2.30	2.60
L1	1.40	1.55	1.70
L4	0.25 BSC		
θ	0°	5°	9°

Revision History:

BLQG3043 Revision: 2025-04-10, Rev. 2.4

Previous Revision

Revision	Date	Revision Date Subjects (major changes since last revision)
1.0	2019-10-21	-
1.1	2021-07-06	Some key Information has been added below. (1) Switching characteristics. (2) Self-clamped Inductive switching current curves. (3) Breakdown voltage curves have been added.
2.0	2022-03-31	The major changes are as follow. (1) In Section 4, the data of ON characteristics and dynamic characteristics have been updated. (2) In Section 5, P_D vs T_J curve and I_{SCIS} vs T_{CLP} curve have been added. (3) In Section 5, all figures of characteristics curves have been reformatted and adjusted in sequence. (4) In Section 6, all figures of test circuit and typical waveform have been redrawn and rearranged. (5) In Section 7, all diagrams of different package and some dimensions information have been redrawn and updated. (6) Formatting and spelling errors in this document have been corrected. (7) Revision history is firstly added in the BLG3040 datasheet .
2.1	2022-08-04	(1) The values of breakdown voltage under different test conditions have been updated.
2.2	2022-09-14	(1) The product name has been changed.
2.3	2022-12-23	(1) The minimum value of breakdown voltage under different conditions has been updated . (2) TO-252 package dimensions updated .
2.4	2025-04-10	(1) Optimized the layout of the Datasheet. (2) Additional description of Operating Junction. (3) The typical value of $BVCER$ is consistent with the $VCES$ on the homepage. (4) The minimum value of $BVCER$ has been adjusted according to the latest testing specifications. (5) Additional description of $ESCIS$: using 3mH inductor and 1K Ω R_g . (6) Updated the package outline drawing of TO-252. (7) Updated the package outline drawing of TO-263.

We Listen to Your Comments

If there is any information within this document that you feel is wrong, unclear, or missing at all, please contact us.

Your feedback will help us to continuously improve the quality of this document.

Published by
Shanghai Belling Co., Ltd.
810, Yishan Road, Shanghai, China
© 2011 Belling
All Rights Reserved.

NOTE:

1. Any use beyond the maximum ratings of the device in performance may cause damage to the device or even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when designing circuit.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. Semiconductor device is sensitive to the ESD, it is necessary to protect the device from being damaged by the ESD when using it.
4. Shanghai Belling reserves the right to make changes in this specification sheet and is subject to change without prior notice.

CONTACT:**上海贝岭股份有限公司**

地址：上海市宜山路 810 号

邮编：200233

联系方式：<https://www.belling.com.cn/contact.html>