
上海贝岭 SHANGHAI BELLING

BLQP065N08G

1. Description

BLQP065N08G, the N-channel Enhanced Power MOSFETs, is obtained by advanced double trench technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. This is suitable device for motor drivers and high speed switching applications.

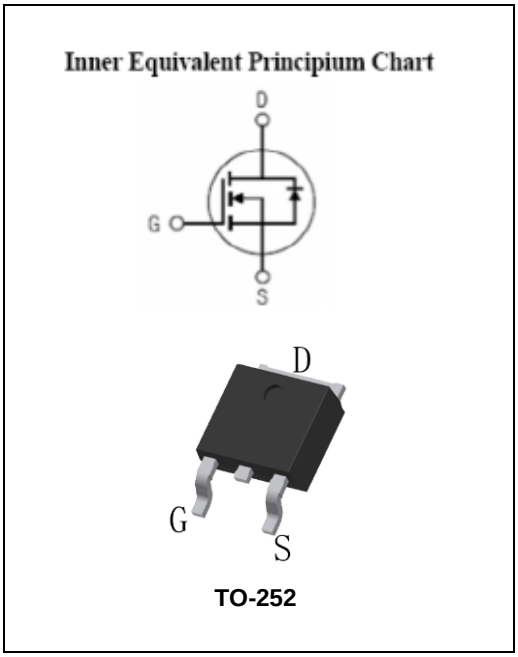

KEY CHARACTERISTICS

Parameter	Value	Unit
V_{DSS}	85	V
I_D	80	A
$R_{DS(on).typ}$	5.4	mΩ

FEATURES

- Fast Switching
- Low On-Resistance ($R_{DS(on)} \leqslant 6.5m\Omega$)
- Low Gate Charge
- Low Reverse transfer capacitances
- High avalanche ruggedness
- RoHS product

APPLICATIONS

- Switching applications
- Motor drivers

ORDERING INFORMATION

Ordering Codes	Package	Product Code	Packing
BLQP065N08G-D	TO-252	QP065N08G	Reel


BLQP065N08G-D

(2) Package type

(1) Chip name

(1) BLQP065N08G：6.5mΩ/85V

(2) D：TO-252



XXXX：Product Code

YYWW：Year&Week

ZZ：Assembly Code

SSSSS：Lot Code

Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited

©2011 Belling All Rights Reserved

2. ABSOLUTE RATINGS

at T_C=25°C，unless otherwise specified

Symbol	Parameter	Rating	Units
V_{DSS}	Drain-Source Voltage	85	V
I_D	Continuous Drain Current, Silicon Limited	109	A
	Continuous Drain Current, Package Limited	80	A
	Continuous Drain Current @T_C=100°C, Silicon Limited	77	A
I_{DM} Note1	Pulsed Drain Current	320	A
V_{GS}	Gate-Source Voltage	±20	V
E_{AS} Note2	Avalanche Energy	121	mJ
P_D	Power Dissipation	150	W
	Derating Factor above 25°C	1	W/℃
T_J， T_{stg}	Operating Junction and Storage Temperature Range	175，–55 to 175	℃
T_L	Maximum Temperature for Soldering	260	℃

Note1：Repetitive Rating：Pulse width limited by maximum junction temperature

Note2：L=0.5mH, Ias=22A, Start T_J=25℃

3. Thermal characteristics

Symbol	Parameter	Max	Units
$R_{\theta JC}$	thermal resistance, Junction-Case	1	℃/W
$R_{\theta JA}$	thermal resistance, Junction-Ambient	75	℃/W

4. Electrical Characteristics

at T_C=25°C, unless otherwise specified

OFF Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min	Typ	Max	
V_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=250μA	85	95	--	V
I_{DSS}	Drain-Source Leakage Current	V_{DS}=85V, V_{GS}=0V	--	--	1	μA
		V_{DS}=68V, V_{GS}=0V @T_C=125°C	--	--	100	μA
$I_{GSS(F)}$	Gate-Source Forward Leakage	V_{GS}=+20V	--	--	100	nA
$I_{GSS(R)}$	Gate-Source Reverse Leakage	V_{GS}=-20V	--	--	-100	nA

Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited

©2011 Belling All Rights Reserved

ON Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min	Typ	Max	
$R_{DS(on)}$	Drain-Source On-Resistance	V_{GS}=10V, I_D=50A	--	5.4	6.5	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=250μA	2.0	3.0	4.0	V
Pulse width tp≤300μs, δ≤2%						

Dynamic Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min	Typ	Max	
C_{iss}	Input Capacitance	V_{DS}=42.5V, V_{GS}=0, f=1MHz	--	3219	--	pF
C_{oss}	Output Capacitance		--	490	--	
C_{rss}	Reverse Transfer Capacitance		--	11.7	--	
Q_g	Total Gate Charge	V_{DD}=42.5V, I_D=50A, V_{GS}=10V	--	61.2	--	nC
Q_{gs}	Gate-Source charge		--	17.5	--	
Q_{gd}	Gate-Drain charge		--	17.2	--	
R_G	Gate resistance	V_{GS}=0, V_{DS}=0		1.4		Ω

Switching Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min	Typ	Max	
$t_{d(on)}$	Turn-On Delay Time	V_{DD}=42.5V, I_D=10A, V_{GS}=10V, R_G=3Ω, Resistive Load	--	17	--	ns
t_r	Rise Time		--	35	--	
$t_{d(off)}$	Turn-Off Delay Time		--	40	--	
t_f	Fall Time		--	22	--	

Source-Drain Diode Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min	Typ	Max	
I_S	Continuous Source Current		--	--	80	A
I_{SM}	Maximum Pulsed Current		--	--	320	A
V_{SD}	Diode Forward Voltage	V_{GS}=0V, I_S=50A	--	--	1.2	V
T_{rr}	Reverse Recovery Time	I_s=20A,V_{GS}=0, di/dt=100A/us	--	55	--	ns
Q_{rr}	Reverse Recovery Charge		--	60	--	nC

Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited

©2011 Belling All Rights Reserved

5. Characteristics Curves

Figure 1. Safe Operating Area

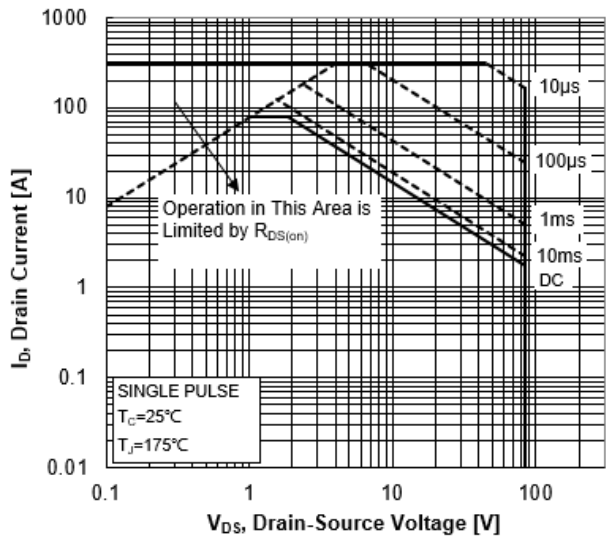


Figure 2. Maximum Power Dissipation vs Case Temperature

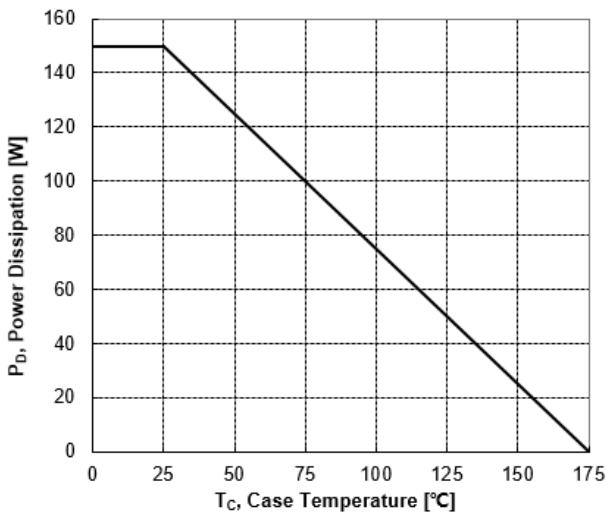


Figure 3. Maximum Continuous Drain Current vs Case Temperature


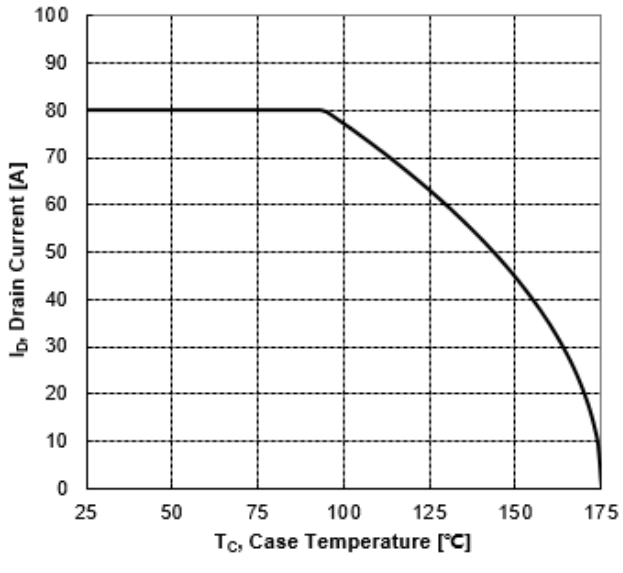


Figure 4. Typical Output Characteristics

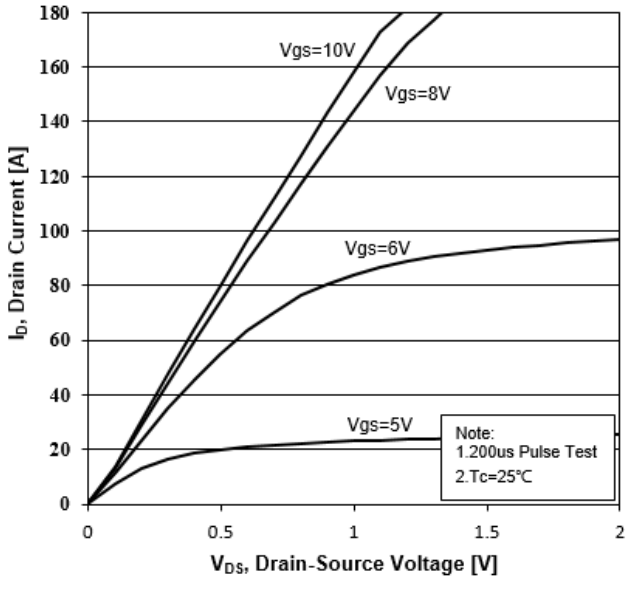

Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited
©2011 Belling All Rights Reserved

Figure 5. Transient Thermal Impedance

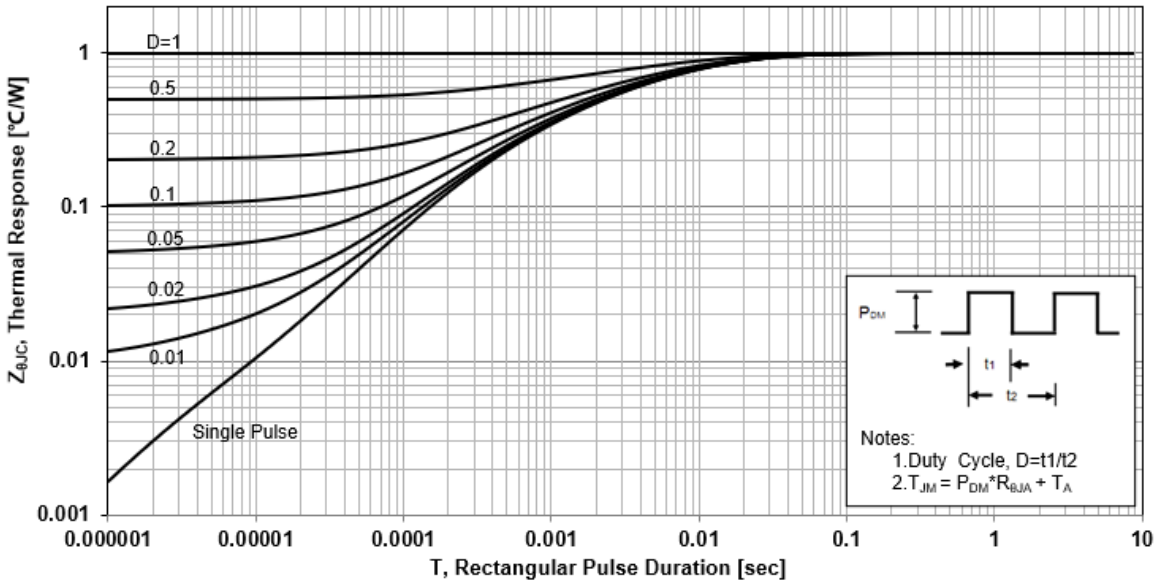


Figure 6. Typical Transfer Characteristics


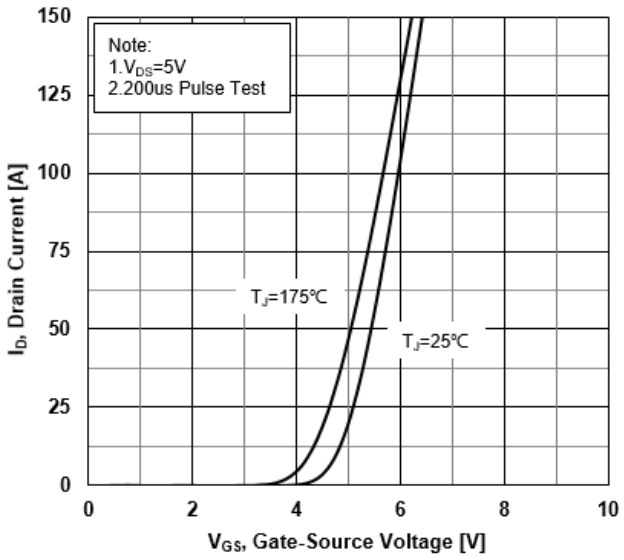


Figure 7. Source-Drain Diode Forward Characteristics

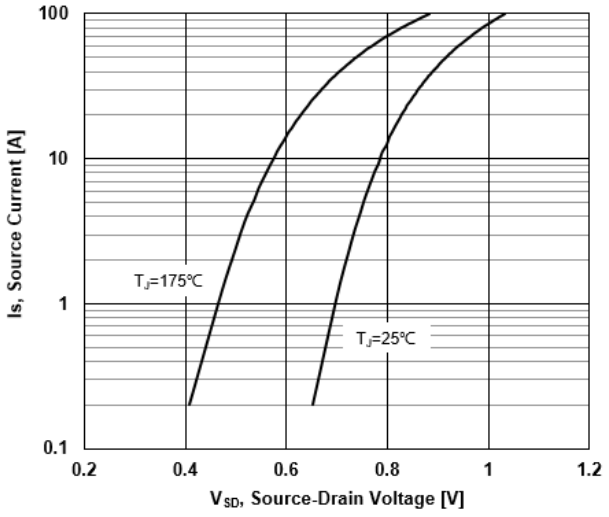

www.belling.com.cn
Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited
©2011 Belling All Rights Reserved

Figure 8. Drain-Source On-Resistance vs Drain Current

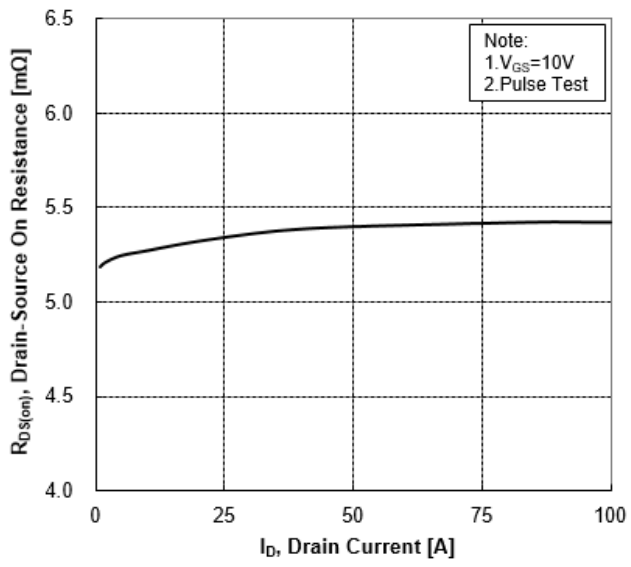


Figure 9. Normalized On-Resistance vs Junction Temperature

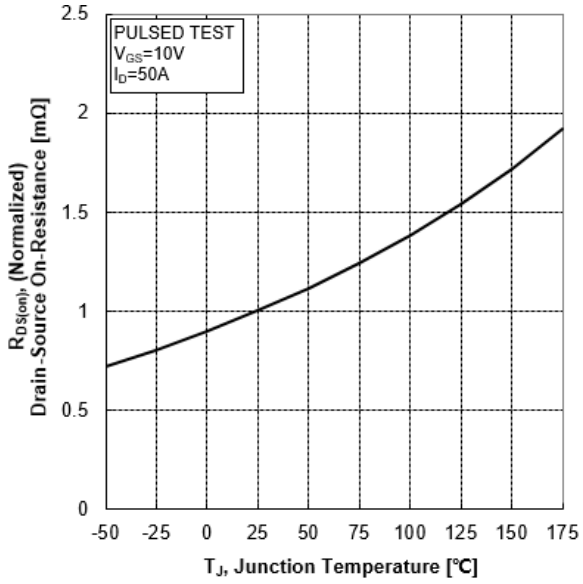


Figure 10. Normalized Threshold Voltage vs Junction Temperature


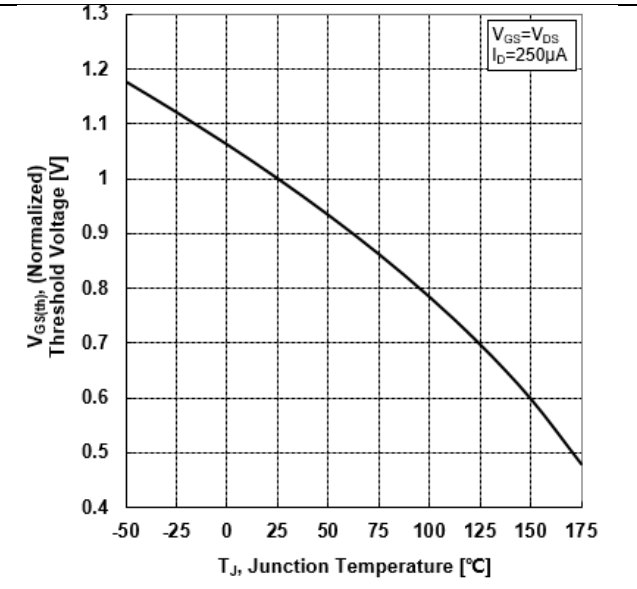


Figure 11. Normalized Breakdown Voltage vs Junction Temperature

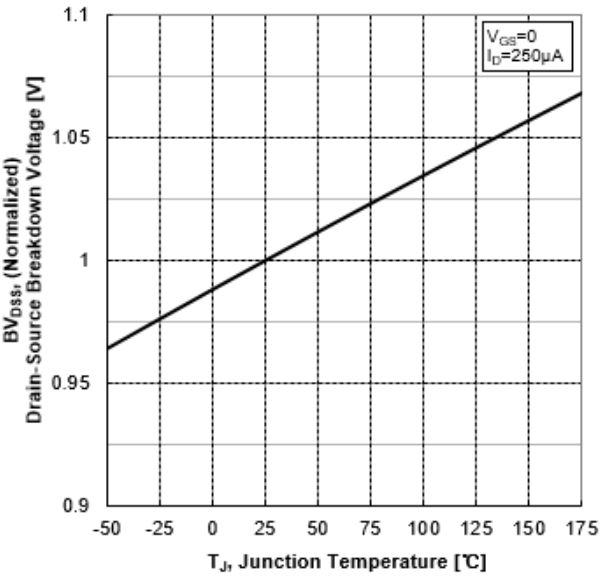

Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited
©2011 Belling All Rights Reserved

Figure 12. Capacitance Characteristics


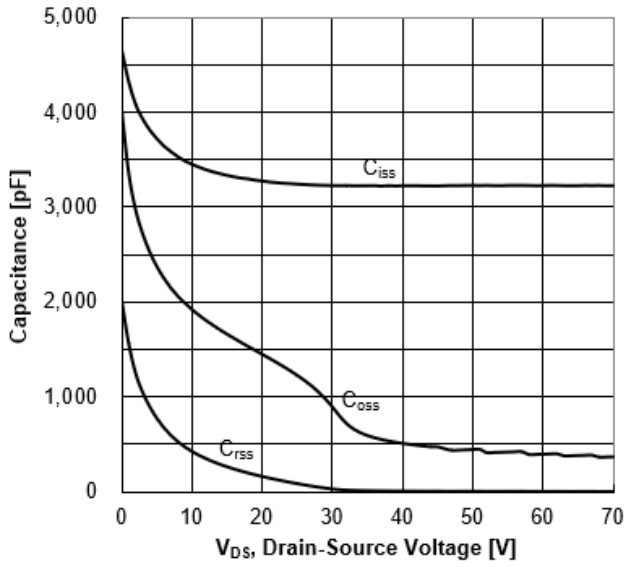


Figure 13. Typical Gate Charge vs Gate-Source Voltage

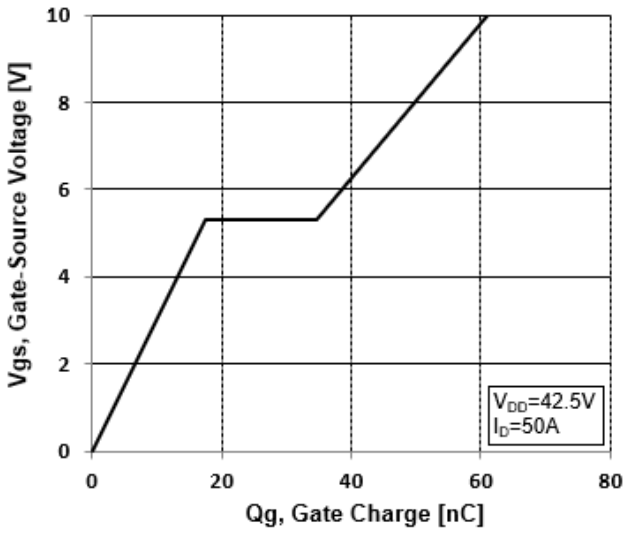

Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited
©2011 Belling All Rights Reserved

6. Test Circuit and Waveform

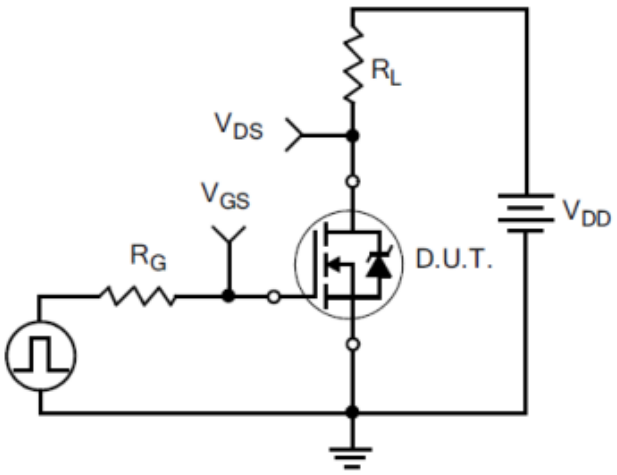
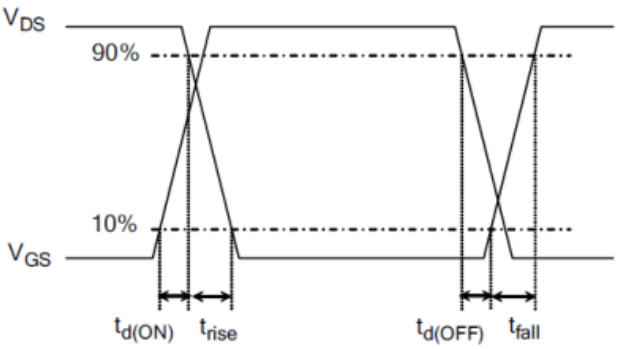
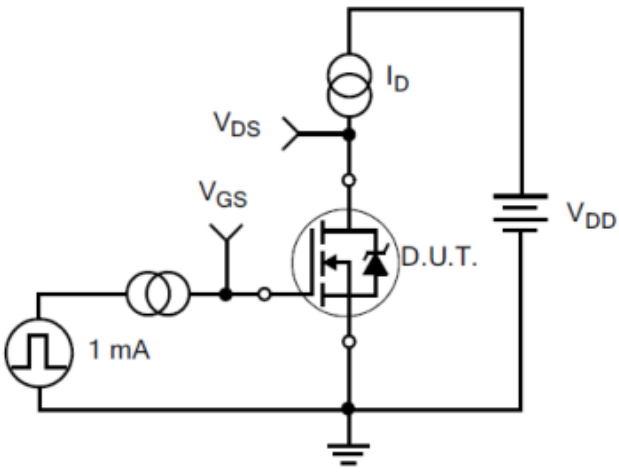
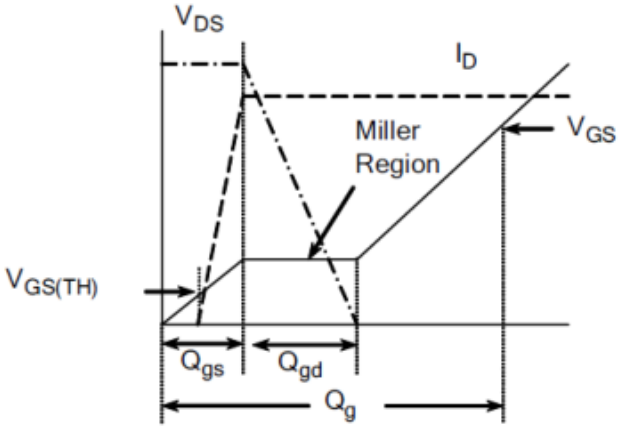
Figure 14. Resistive Switching Test Circuit	Figure 15. Resistive Switching Waveforms
	

Figure 16. Gate Charge Test Circuit	Figure 17. Gate Charge Waveforms
	

Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited
©2011 Belling All Rights Reserved

Figure 18. Diode Reverse Recovery Test Circuit

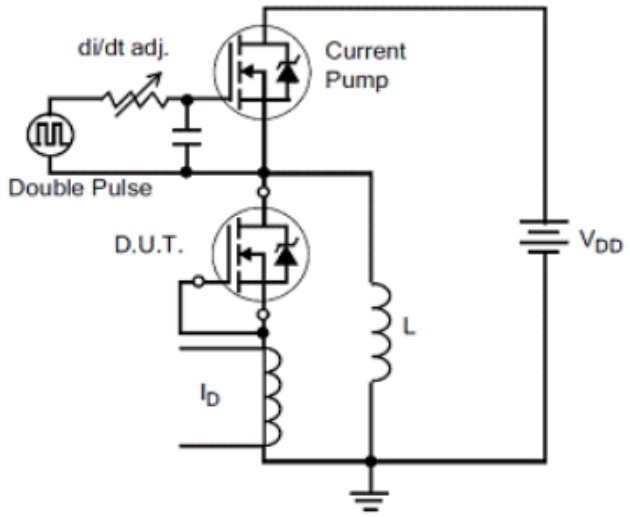


Figure 19. Diode Reverse Recovery Waveform

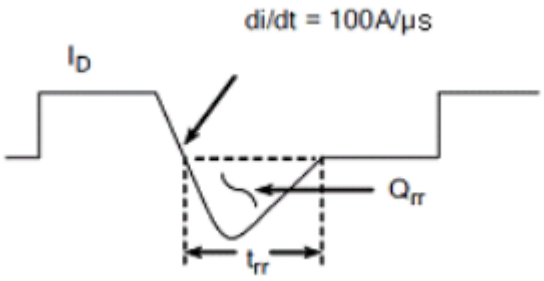


Figure 20. Unclamped Inductive Switching Test Circuit


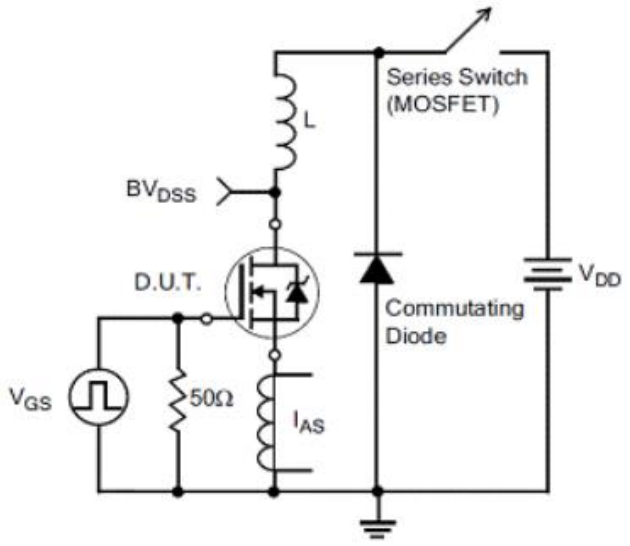


Figure 21. Unclamped Inductive Switching Waveform

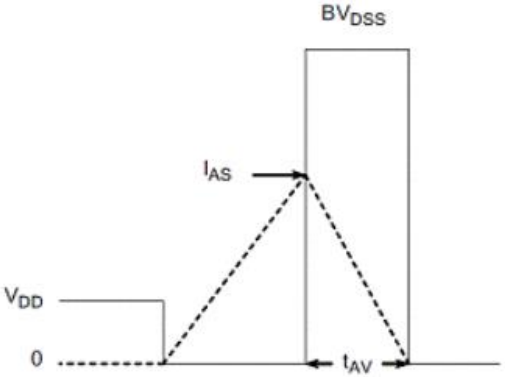


$$E_{AS} = \frac{I_{AS}^2 L}{2}$$

Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited
©2011 Belling All Rights Reserved

7. Package Description

TO-252

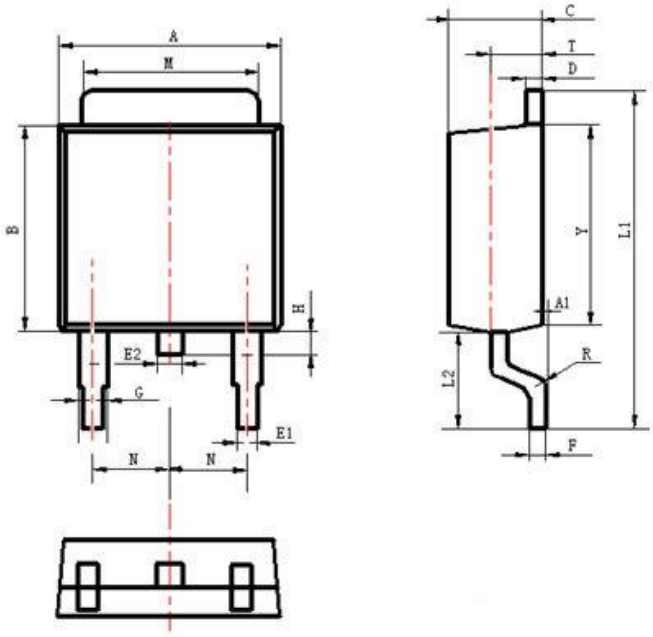

Items	Values(mm)	
	MIN	MAX
A	6.30	6.90
A1	0	0.13
B	5.70	6.30
C	2.10	2.50
D	0.30	0.60
E1	0.60	0.90
E2	0.70	1.00
F	0.30	0.60
G	0.70	1.20
L1	9.60	10.50
L2	2.70	3.10
H	0.60	1.00
M	5.10	5.50
N	2.09	2.49
R	0.3	0.3
T	1.40	1.60
Y	5.10	6.30

Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited
©2011 Belling All Rights Reserved

NOTE:

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when circuit designing.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. MOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. Shanghai Belling reserves the right to make changes in this specification sheet and is subject to change without prior notice.

CONTACT:

上海贝岭股份有限公司（总部）

地址：上海市宜山路 810 号

邮编：200233

电话：021-24261000

产品业务咨询及技术支持

电话：021-24261326

传真：021-64852222

邮箱：marketing@belling.com.cn

上海贝岭深圳分公司（华南区）

地址：深圳市福田中心区民田路新华保险大厦 1510 室

邮编：518031

电话：0755-33336776 0755-33336770

传真：0755-33336788

上海贝岭北京办事处（华北区）

地址：北京市西城区新华里 16 号院锦官苑小区 10 号楼 1 单元 1505 室

邮编：100044

电话：010-64179374

传真：010-8835 9236

Belling Proprietary Information. Unauthorized Photocopy and Duplication Prohibited

©2011 Belling All Rights Reserved